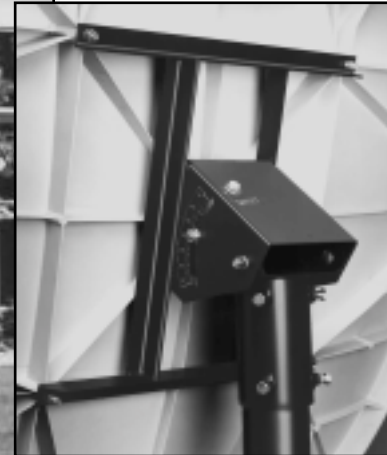
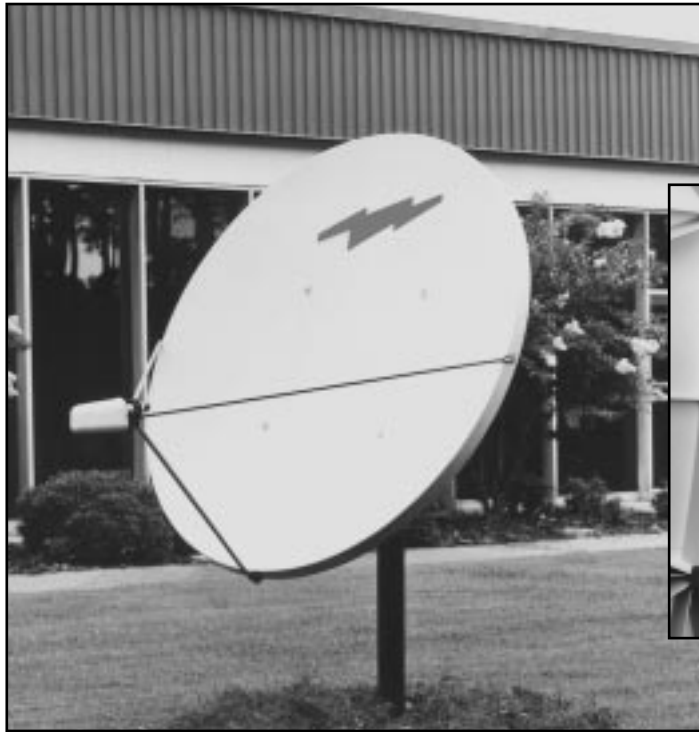


1.8m Receive-Only Offset Antenna System

Sturdy Az/EI mount with elevation scale

FEATURES

- One-piece precision offset thermoset-molded reflector.
- Single bolt fine elevation adjustment.
- Galvanized .75 in. O.D. feed support legs.
- Factory pre-assembled mount.
- Cadmium-plated hardware for maximum corrosion resistance.
- Available with a wide variety of C-Band or Ku-Band feeds.

DESCRIPTION

The Andrew Corporation Type 180 1.8m Offset Antenna is a rugged commercial grade product suitable for the most demanding applications. The reflector is thermoset-molded for strength and surface accuracy. Molded into the rear of the reflector is a network of support ribs which not only strengthens the antenna, but also helps to sustain its critical parabolic shape.

The Az/EI mount is constructed from heavy-gauge steel to provide a rigid support to the reflector. Four heavy-duty lockdown bolts secure the mount to any 4.50 in. O.D. mast and prevent slippage in high winds. A specially formulated powder paint process offers excellent protection from weather-related corrosion. Hot-dip galvanizing is optional for extreme environmental conditions.

1.8m Receive-Only Offset Antenna System

RF PERFORMANCE

	<u>C-Band</u>	<u>Ku-Band</u>
Effective Aperture	1.8m (71 in.)	1.8m (71 in.)
Operating Frequency	3.7-4.2 GHz	10.95-12.75 GHz
Polarization	Linear (Circular optional)	Linear (Circular optional)
Midband Gain (± 2 dBi)	35.3 dBi	45.5 dBi
3 dB Beamwidth	3.0°	.99°
Antenna Noise Temperature @ 30° EL	30°K	23°K
VSWR	1.3:1 Max.	1.3:1 Max.
Cross-Polarization Discrimination	>30 dB On Axis (Linear)	>30 dB On Axis (Linear)
Feed Interface	CPR-229	WR75 Cover Flange (UBR120)

MECHANICAL PERFORMANCE

Reflector Material	Glass Fiber Reinforced Polyester
Antenna Optics	One-Piece Offset Feed Prime Focus
Mount Type	Elevation over Azimuth
Elevation Adjustment Range	10° - 70° Continuous Fine Adjustment
Azimuth Adjustment Range	360° Continuous
Mast Pipe Interface	4.50 in. (114 mm) Diameter
Wind Loading	Operational 50 mi/h (80 km/h) Survival 125 mi/h (200 km/h)
Temperature	-50°C to 80°C
Humidity	0 to 100% (Condensing)
Atmosphere	Salt, Pollutants and Contaminants as Encountered in Coastal and Industrial Areas
Solar Radiation	360 BTU/h/ft ²
Shock and Vibration	As Encountered During Shipping and Handling



Connecting the Wireless World

Andrew Corporation
10500 W. 153rd Street
Orland Park, IL 60462 USA

Customer Support Center
1315 Industrial Park Drive
Smithfield, NC 27577 USA
Telephone +1-919-989-2205
Fax: +1-919-989-2200

Internet
www.andrew.com

All designs, specifications and availabilities of products and services presented in this bulletin are subject to change without notice.

Bulletin 11015 (1/04) Copyright © 2004
Andrew Corporation, Orland Park, IL 60462 USA

Printed in USA