


Product Application



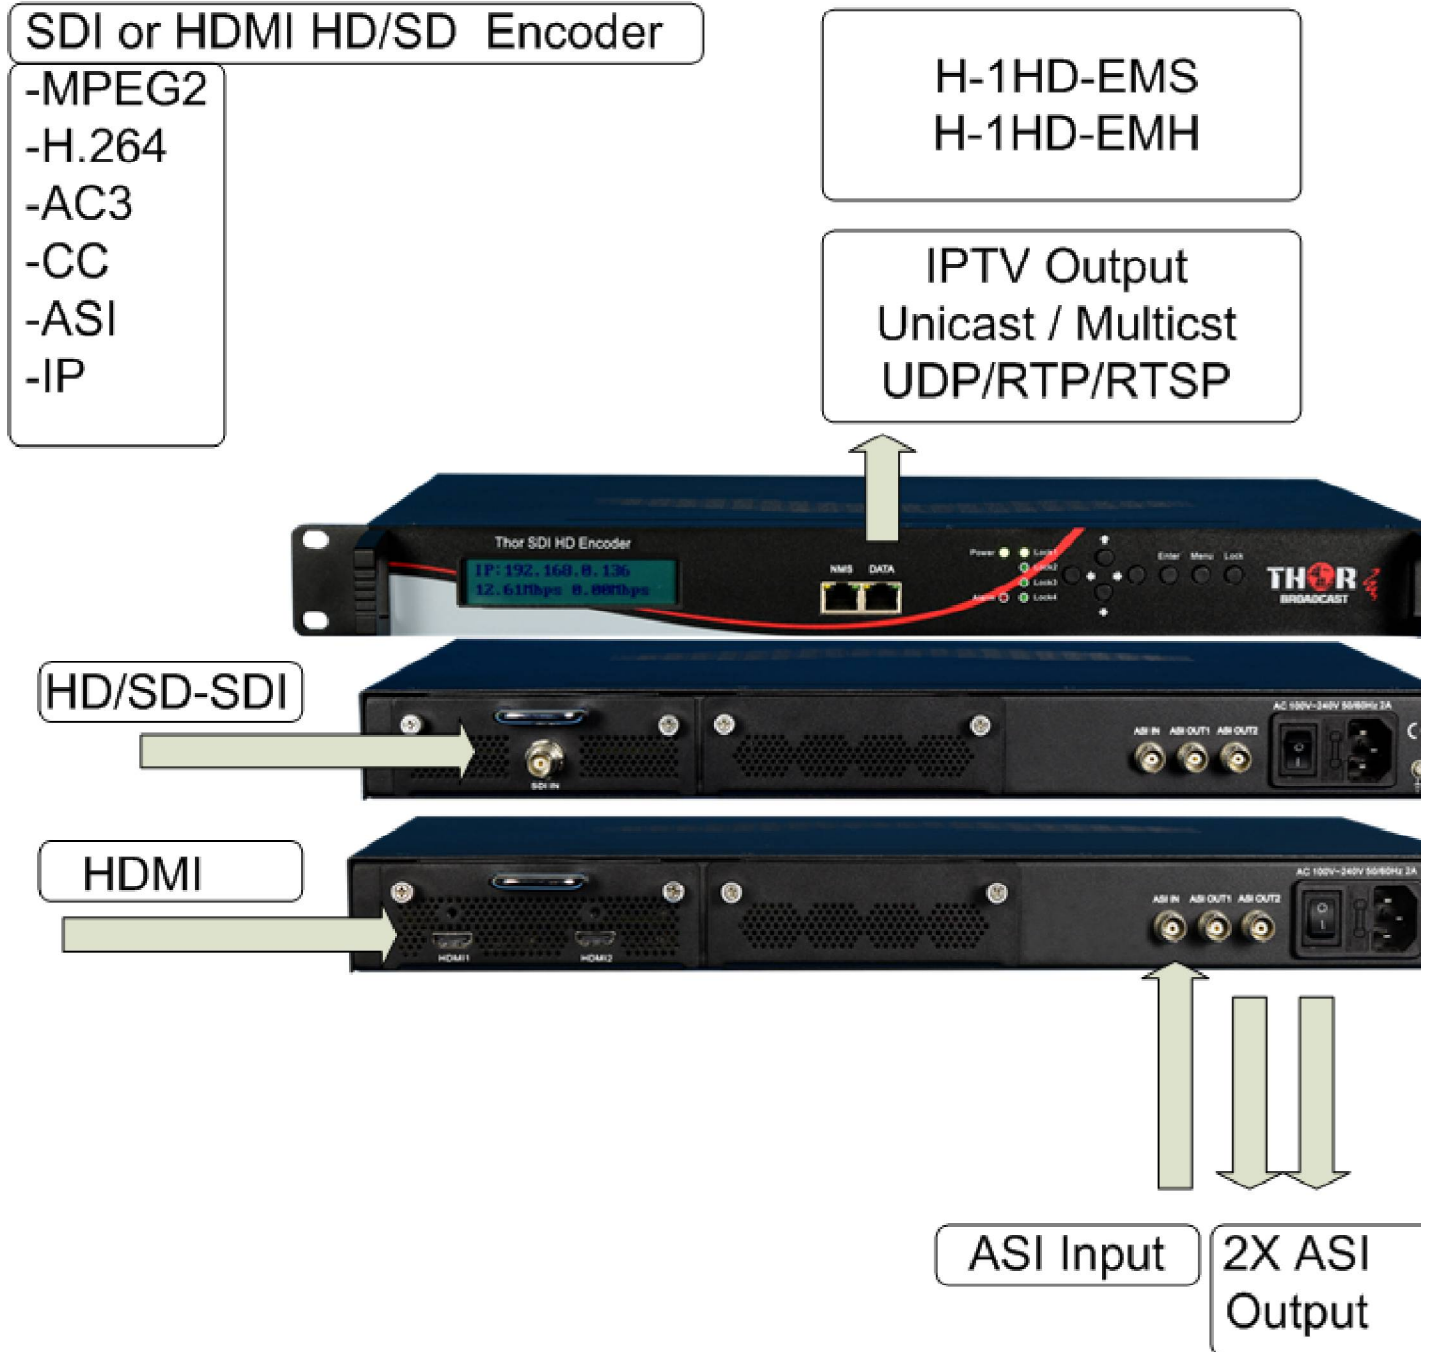

User's Manual H-4HD-EMS

Product Specifications	
<i>* All Specifications Subject to Change Without Notice</i>	
input	4x HD-SDI
Supported Output Resolutions	1080p60, 1080p59.94, 1080p50 1080i60, 1080i 59.94, 1080i50 to 720p60, 720p59.94, 720p50 720i60, 720i59.94, 720i50
video Codecs	MPEG-2 HL MPEG-4 AVC / H.264
audio Codecs	MPEG1 Layer 2 Dolby AC / 3 LC-AAC (optional)
bit Rate	0.8 - 19.0 Mbps CBR or VBR
Advanced Video Features	Input Deinterlacing , Noise Reduction, Sharp Supports Closed Captioning Standard 708 w
Audio Sampling Rate	48 KHz, 24 bit resolution
Audio Bit Rate	64 - 384 Kbps Each Channel
IP Transport Stream Output	1x MPTS UDP 9x SPTS UDP
ASI Transport Stream Output	2x ASI Multiplexed Output

Management Interface	Web Based Browser Interface Full Front Panel LCD Interface
Dimensions	480 x 455 x 45 mm
Weight	3.25 Kg
Operating Temperature	0 - 45 C