


SPECIFICATIONS

FREQUENCY BAND: 10.7 - 11.75 GHz
INSERTION LOSS: 0.30 dB MAX
 0.20 dB TYP
VSWR : 1.2:1 MAX
REJECTION : 85 dB AT 12.75 TO 14.50 GHz
FINISH
FLANGE FACES: CHROMATE CONVERSION COATED
EXTERIOR: WHITE PAINT, COLOR
 No. 17875 PER FED-STD-595

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
C	SEE ECN# 3147	10-20-10	

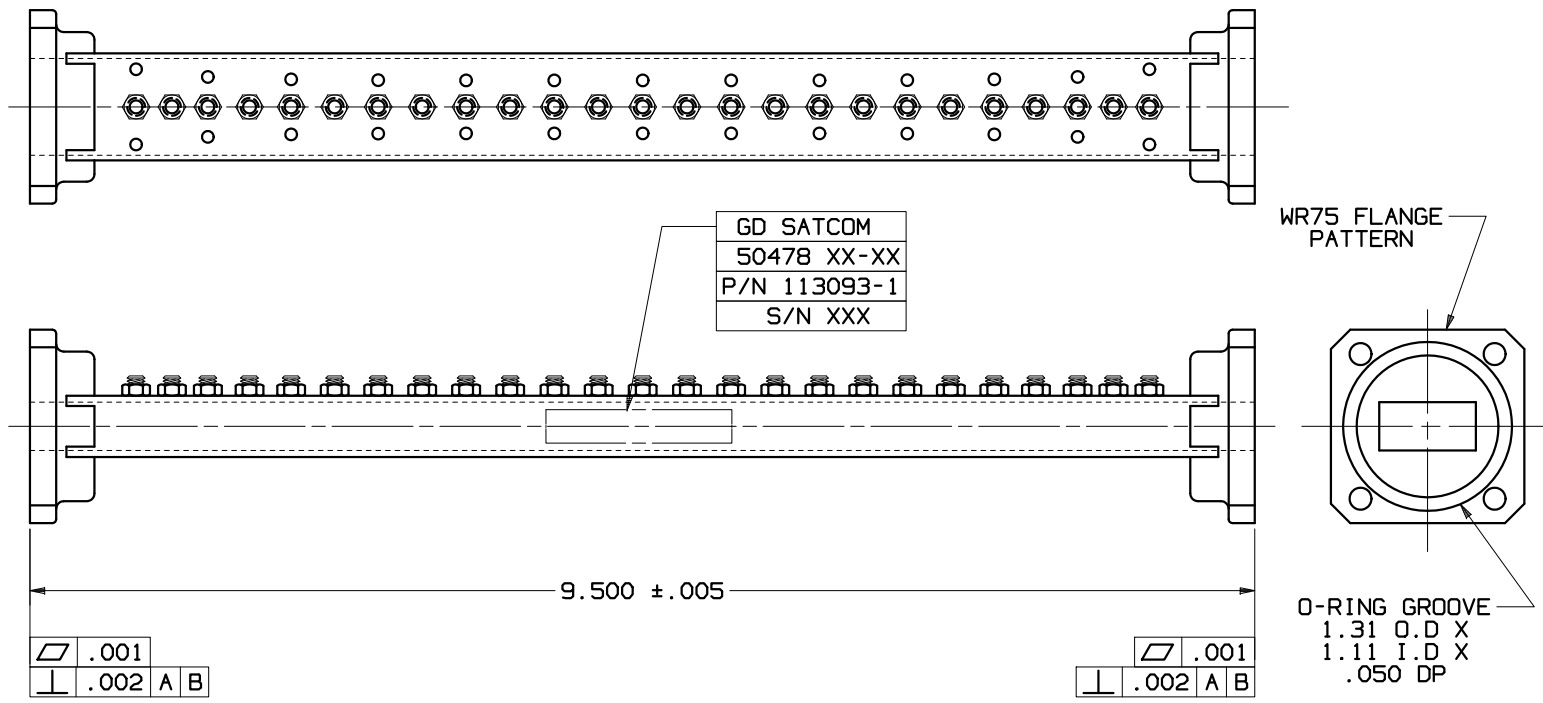

NOTES: UNLESS OTHERWISE SPECIFIED.

UNLESS OTHERWISE SPECIFIED INTERPRET DIMENSIONING & TOLERANCING PER ANSI Y14.5M-1992. DIMENSIONS ARE IN INCHES. DIMENSIONS SHOWN IN () ARE FOR REFERENCE ONLY. TOLERANCES ARE: SURFACE- TOLERANCES- .XX ±.01 .XXX ±.002 .XXXX ±.0010 ANGLES ±0°30' 32 ✓ MATERIAL:	APPROVALS DRAWN: TOVALIN, L CHECKED: 03-12-04 ENGR: MFG: QA:	DATE 03-12-04 03-12-04	GENERAL DYNAMICS PROPRIETARY GENERAL DYNAMICS SATCOM Technologies 3111 Fujita St., Torrance, CA 90505, (310) 539-6704		
	EAR CONTROLLED: Export or re-export subject to 15 CFR 700-799.		Ku-BAND BANDPASS FILTER		
	SIZE: C FSCM No.: 50478 SCALE: 3:2	DWG No.: 113093-1 SHEET 1	REV C		