

LC 2150A Series

Active (Amplified-Zero Loss) L-Band Combiners




LC8 2150A
8-way Active L-Band Combiner



LC24 2150A
24-way Active L-Band Combiner

General Description:

The LC 2150A series commercial quality active L-band combiners meet strict level, match, and loss specifications achieved through the use of Quitech's proprietary microstrip and SMT technology. These unity gain combiners operate over the satellite L-band (950-2150 MHz) frequency range and enable the combining of RF signals with repeatable performance over the entire frequency range and across all I/O ports.

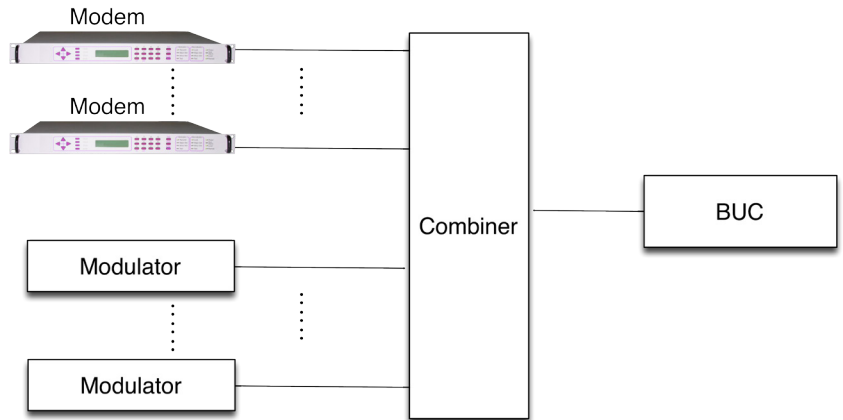

Specifications:*	LC12 2150A	LC24 2150A
Operating Frequency:	950-2150 MHz	950-2150 MHz
Configurations:	1x12	1x24
Impedance:	75 Ω or 50 Ω	75 Ω or 50 Ω
P1dB:	-2 dBm (each input)	-5 dBm (each input)
Insertion Loss:	0 \pm 2 dB	0 \pm 2.5 dB
Frequency Response:	\pm 2 dB	\pm 2.5 dB
Isolation:	18 dB	18 dB
Input Return Loss:	12 dB	12 dB
Output Return Loss:	12 dB	12 dB
Noise Figure:	19 dB	27 dB
RF Connectors:	F-Type, BNC 75 Ω or 50 Ω	F-Type, BNC 75 or 50
Power Requirements:	18-24 VDC Via 2-Pin Quick Connect Barrier Strip ¹	18-24 VDC Via 2-Pin Quick Connect Barrier Strip ¹
Power Consumption:	6 W	13 W
Mechanical:	1 RU: 1.75" H x 19" W x 6.5" D	2 RU: 3.5" H x 19" W x 14" D
Weight:	5.3 lbs Gross (boxed), 2.8 lbs Net	10 lbs Gross (boxed), 6.5 lbs Net

*Specifications may vary with connector type. See individual specification sheet for specific performance data.

¹A/C adapter sold separately