




Ku band 4-Port Diplexer Technical Specifics		
Operating Frequency, GHz	TX	RX
Standard	14.0-14.5GHz	12.25-12.75GHz
Extend	13.75-14.5GHz	10.75-12.75Ghz
Polarization	Linear	Linear
Insertion Loss, dB	≤0.25dB	≤0.25dB
Interface	WR75	WR75
VSWR	1.25:1	1.25:1
Tx Power Capability, KW	1KW	
Isolation, Tx to Rx, dB	≥85dB	
Tx/Tx Rx/Rx Linear,dB	≥30dB	

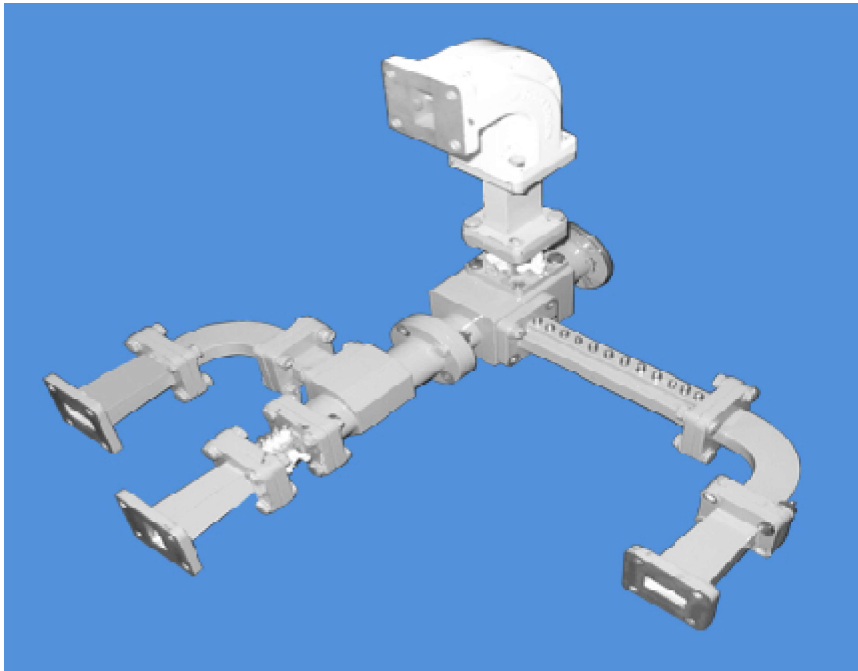

SatelliteDish.com ®

(954) 941-8883