

50W GaN-based C-Band BUC

SSPBg-210C™ series



NEXT GENERATION GaN TECHNOLOGY

Features

- Up-converts an L-Band input frequency 950 – 1525 MHz to the C-Band frequency of 5.85 – 6.425 GHz (5.85-6.725 GHz optional)
- Rated Output Power of 50W
- Phase-locked local oscillator locks directly to an external
- 10 MHz reference
- Exceeds IESS 308/309 Phase/Noise requirements by 3 dB
- Robust, weatherproof package
- Protection against thermal runaway and out-of-lock conditions
- Serial M&C via RS232/RS485
- Designed to meet MIL-STD-188-164A

Overview

The SSPBg-210C™ series are hub-mount up-converter transmitters, using GaN Technology, operating in the C-Band. The SSPBg-210C™ is an integrated unit, complete with power supply, phase-locked oscillator, mixer, filter and cooling mechanism. Intended for outdoor operation, the SSPBg-210C™ provides the utmost in convenience and efficiency. Other SSPBs are also available for higher powers or for operation at other up-link frequencies.


The hub-mount SSPBg-210C™ is constructed in a compact cooling enclosure for outdoor operation. The units are weatherproof. They are the smallest fully integrated units on the market today.

The design of these units is based on Advantech Wireless' industry proven reliable solid-state high power amplifiers. Built-in design features result in a product with exceptional linearity and operating efficiency. The use of high efficiency power supply and conservative thermal design contribute to the trouble-free operation of the unit.

Accessories

- High Power Output Circulator and Dummy Load
- Mounting kit
- RS232/485 adaptor and outdoor serial cables

Designed to meet MIL-STD-188-164A

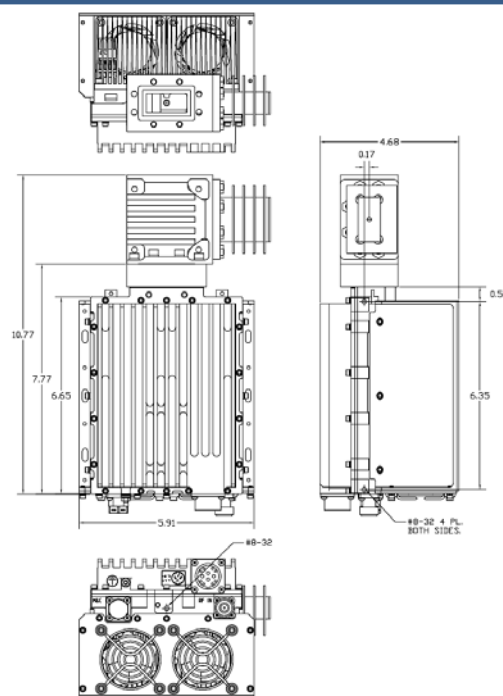

Outline

Application

The SSPB's convert an L-Band signal (950 - 1525 MHz) to the C-band frequency of 5.85 – 6.425 GHz (optional 5.85-6.725 GHz). Designed for C-Band satellite up-link applications, the SSPBg-210C™ series are fully integrated units with up to 50W output power designed for mounting outdoors, near the hub of an antenna.

The size and weight of this very compact design makes it especially attractive for man-pack terminal applications. C-Band SSPBs are available in output power of up to 1000W.





Technical Specifications

Electrical Characteristics		50W	
Rated Output power		+47.0 dBm typ.	
Linear Output power		+44.0 dBm min.	
Conversion gain min.		+68 dB	
Input /Output frequency range		950-1525 MHz/C-Band 5.85 – 6.425 GHz (5.85-6.725 GHz optional)	
Input Level		-22 dBm for rated output power	
Gain flatness		3.0 dB p-p, typical over 500 MHz,1.0 dB p-p /40 MHz	
Gain variation over temperature		3.0 dB p-p max over full operating range	
Input VSWR, in-band		1.5: 1	
Output VSWR		1.5: 1	
Input impedance		50 Ω	
Noise Power Density in Rx Band		-150 dBm/Hz max without external Rx Reject Filter	
Noise Power Density in Tx Band		-75 dBm/Hz	
Spurious at rated power		-55 dBc, max	
AM/PM conversion		1°/dB at linear power	
Spectrum Regrowth		-30 dBc, max at linear output power @ 1.0 symbol rate for QPSK/OQPSK/8PSK modulation	
Local Oscillator frequency (LO)		4.9 GHz	
LO leakage		-20 dBm max	
Phase noise		-55 dBc/Hz at 10Hz	-65 dBc/Hz at 100Hz
		-73 dBc/Hz at 1000Hz	-83 dBc/Hz at 10 kHz
		-105 dBc/Hz at 100 kHz	-110 dBc/Hz at 1 MHz
Integrated (SSB) Phase Noise		2° RMS typical	
Group Delay (over any 40 MHz):	Linear	0.03 ns /MHz, max	
	Parabolic	0.01 ns/MHz ² , max	
	Ripple	1 nsec p-p, max	
External Reference			
Reference frequency		10 MHz	
Recommended reference frequency phase noise		-115 dBc/Hz at 10 Hz	-150 dBc/Hz at 10 kHz
		-135 dBc/Hz at 100 Hz	-160 dBc/Hz at 100 kHz
		-148 dBc/Hz at 1000 Hz	
Reference frequency level		0 dBm ± 5 dB	
Power Requirements			
Supply voltage		40 V to 75 V DC via separate connector	
Power consumption (nominal)		240W @47dBm, 150W @ 44 dBm (Plin)	
Mechanical Characteristics			
Cooling		Mini-fan	
Dimensions (L x W x H)		23.35 x 15.01 x 11.88 cm (10.77” x 5.91” x 4.68”)	
Weight		3.5 kg (7.7 lbs)	
Finish		White (option NATO Green)	
Interfaces:		RF input Type N (F)	
		M&C and Power : MS311E12-14P	
		RF output CPR137G (grooved) / Type N (F) optional	
Environmental Conditions			
Temperature:	Operating	-30°C to +55°C option -50°C to +55°C	
	Storage	-55°C to +85°C	
Humidity		100%, condensing	
Altitude		10,000' AMSL, de-rated 2°C/1,000' from AMSL	

Specifications are subject to change without notice

NORTH AMERICA USA

Tel: +1 703 659 9796
Fax: +1 703 635 2212
info.usa@advantechwireless.com

CANADA

Tel: +1 514 420 0045
Fax: +1 514 420 0073
info.canada@advantechwireless.com

EUROPE

UNITED KINGDOM

Tel: +44 1480 357 600
Fax: +44 1480 357 601
info.uk@advantechwireless.com

RUSSIA & CIS

Tel: +7 495 971 59 18
info.russia@advantechwireless.com

INDIA

Tel: +91 33 2415 5922
info.india@advantechwireless.com

SOUTH AMERICA

Tel: +1 514 420 0045
Fax: +1 514 420 0073
info.latam@advantechwireless.com

BRAZIL

Tel: +55 11 3054 5701
Fax: +55 11 3054 5701
info.brazil@advantechwireless.com

An ISO 9001 : 2008 Company



Ref.: PB-SSPBmg-2G-C-50W-002-16077

www.advantechwireless.com