

# Double Ridge Straight Sections



## Double Ridge Straight Sections Description

- 3.5 - 40.0 GHz
- 1.10 Typical Max VSWR (VSWR varies with design)
- Numerous Flange Configurations available
- Aluminum (6061) Waveguide Available
- Corrosion protection with a flat black finish


### FLANGE TYPES

**C** = COVER STYLE

**G** = GASKET STYLE

## MOUNTING HOLES

- 1 =ALT. TAP & CLEAR
- 2 =ALL TAPPED
- 3 = ALL CLEAR

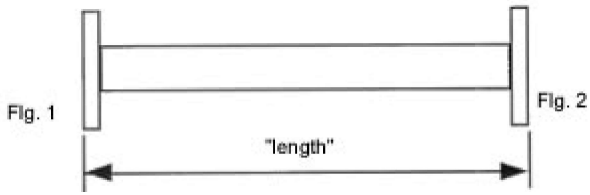

WR SIZE	FREQ: GHZ
180	18.0 - 40.0
110	11.0 - 26.5
750	7.50 - 18.0
650	6.5 - 18.0
580	5.80 - 16.0
475	4.75 - 11.0
350	3.50 - 8.20

## SAMPLE P/N: AMC-DRSS580-C3/C3-24-A

MODEL NO:	W/G SIZE	FLANGE TYPE	LENGTH	MATERIAL A=Aluminum
AMC-DRSS	580	-C3/C3-	24	A

The above referenced part number describes the following item: WRD580 straight section assembly, both flanges are cover flanges with clear holes, made of aluminum material. The overall length is 24 inches from flange face to flange face.