

Double Ridge Twists



- 3.5 - 40.00 GHz
- 1.15 Typical Max VSWR (VSWR varies with design)
- Numerous Flange Configurations available
- Aluminum (6061) Waveguide Available
-

FLANGE TYPES

C = COVER STYLE


G = GASKET STYLE

MOUNTING HOLES

- 1 =ALT. TAP & CLEAR

- 2 =ALL TAPPED

- 3 = ALL CLEAR

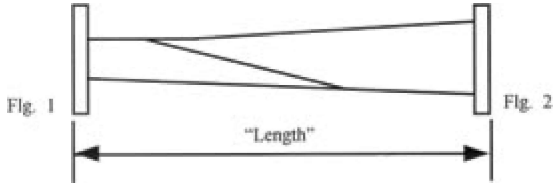

WR SIZE	FREQ: GHZ	MINIMUM LENGTH
180	18.0 - 40.0	4.0
110	11.0 - 26.5	4.0
750	7.50 - 18.0	5.0
650	6.5 - 18.0	5.0
580	5.80 - 16.0	5.0
475	4.75 - 11.0	7.0
350	3.50 - 8.20	9.0

SAMPLE P/N: AMC-DRTW580-C1/C1-10-A

MODEL NO:	W/G SIZE	FLANGE TYPE	LENGTH	MATERIAL A=Aluminum
AMC-DRTW	580	-C1/C1-	10	A

The above referenced part number describes the following item: WRD580 90 degree twist section assembly, both flanges are cover flanges with alt. tapped & clear holes, made of aluminum material. The overall length is 10 inches from flange face to flange face.