

## AL-4018S Single Drive El/Az Positioner

### Cost Effective, Highly Accurate Tracking Solution

The AL-4018S is a highly accurate and cost-effective elevation over azimuth tracking positioner capable of supporting small to mid-range antenna sizes. The AL-4018S may be ground-based, transportable or shipboard (with additional stabilization), which makes it ideal for aeronautical test telemetry and Earth Observation LEO/MEO Satellite Tracking and navigation.

The modular system can be modified to meet customers' specific requirements based on ORBIT's field-proven building blocks. The system is built for easy assembly and dismantling and includes comprehensive BIT (Built-In-Test) capabilities for the entire pedestal.

### Key Features

- Elevation Over Azimuth axes configuration (stabilization is optional)
- Cost-effective, highly accurate pedestal
- Digital servo amplifier to control antenna motion
- Brushless motor and planetary gear assembly
- Modular & easily maintainable
- Robust, reliable and environmentally durable

### Typical Applications



Aeronautical Test Telemetry



LEO/MEO Satellite Tracking



Weather Radar

### Supported Antenna Reflector Size




## AL-4018S Operating Specifications\*

Parameters	Specification
Bearing Moment Capacity (static)	8150 Nm (6000 ft·lb)
Maximum Payload	390 kg (900 lb)
Delivered Torque	920 Nm (680 ft·lb)
Peak Torque	1500 Nm (1120 ft·lb)
Peak Velocity	Up to 30°/Sec
Peak Acceleration	Up to 30°/Sec <sup>2</sup>
Backlash	0.05 deg
Data Take-off Accuracy	± 0.04 deg
Orthogonality	0.02 deg max
Limit-to-Limit Travel	± 200 deg Azimuth** -5 up to +185 deg
Mechanical Stops (Shock absorber mechanism)	-7 up to +187 deg Elevation
Motor Type (with integral encoder and FAIL-SAFE brake)	Brushless
Position Indicator	Absolute Encoder
AC Input Voltage	110/220 V
Power Consumption	3.5 kVA max
Weight (including base riser)	410 kg (900 lb)
Rotary Joint (AZ) <sup>2</sup>	option
Slip-Ring (AZ) <sup>2</sup>	option
Antenna Motion System	Integrated Digital Servo Amplifier (DSA)
Position Control Interface	RS-422
Operational Safety	Over-current limit, voltage and temperature protection, electrical limit switch and mechanical stop.

\* Specifications apply both for elevation and azimuth axes unless otherwise specified

\*\* When slip-ring or rotary joint options are selected, the azimuth travel is Nx360 degrees

## General View of AL-4018S

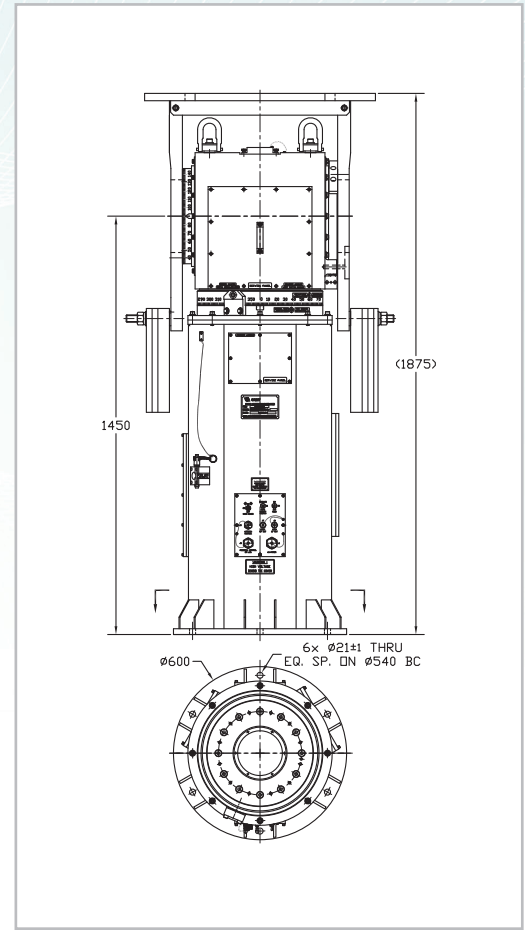

All measurements are subject to change without prior notification

© 2015 ORBIT Communication Systems Inc. All Rights Reserved | V.1015

## AL-4018S Environmental Specifications

Parameters	Specification		
Temperature range	Operating	-25°C to 55°C (-13°F to +131°F)	
	Storage	-40°C to 70°C (-40°F to +159°F)	
Relative humidity (including condensation)	Operating	Up to 95% @ 25°C (80°F)	
	Storage	100% @ 25°C (80°F)	
Rain		< 150 mm/hour (6 in/hour)	
Wind speed	Operating	Continuous	90 km/h (56 mph) for 1.8m dish size 80 km/h (50 mph) for 2.4m dish size
		Intermittent (gusts) with reduced performance	Up to 100 km/h (62 mph) for 1.8m dish size Up to 90 km/h (56 mph) for 2.4m dish size
	Non-Operating Transport, Survival	Both axes stowed, with elevation axis at zenith (90°)	192 km/h (120 mph) for 1.8m dish size 192 km/h (120 mph) for 2.4m dish size
Altitude	Operating	3,500 m (12,000 ft)	
	Non-operating (transport)	12,000 m (40,000 ft)	
Insects and fungi		Designed for tropical regions (using fungus resistant materials)	
Salt sea atmosphere, sand, dust, solar radiation, vibration & shock		Suitable for outdoor, ground-mobile applications, operating under environmental conditions encountered in coastal regions	

For additional options please contact our sales department at: [www.orbit-cs.com/contact-us](http://www.orbit-cs.com/contact-us)

