


1 Video 2 Audio 1 DVB-ASI or SD-SDI FIBER OPTIC TRANSPORT

It can be setup as a :

Uni-directional or bi-directional Link

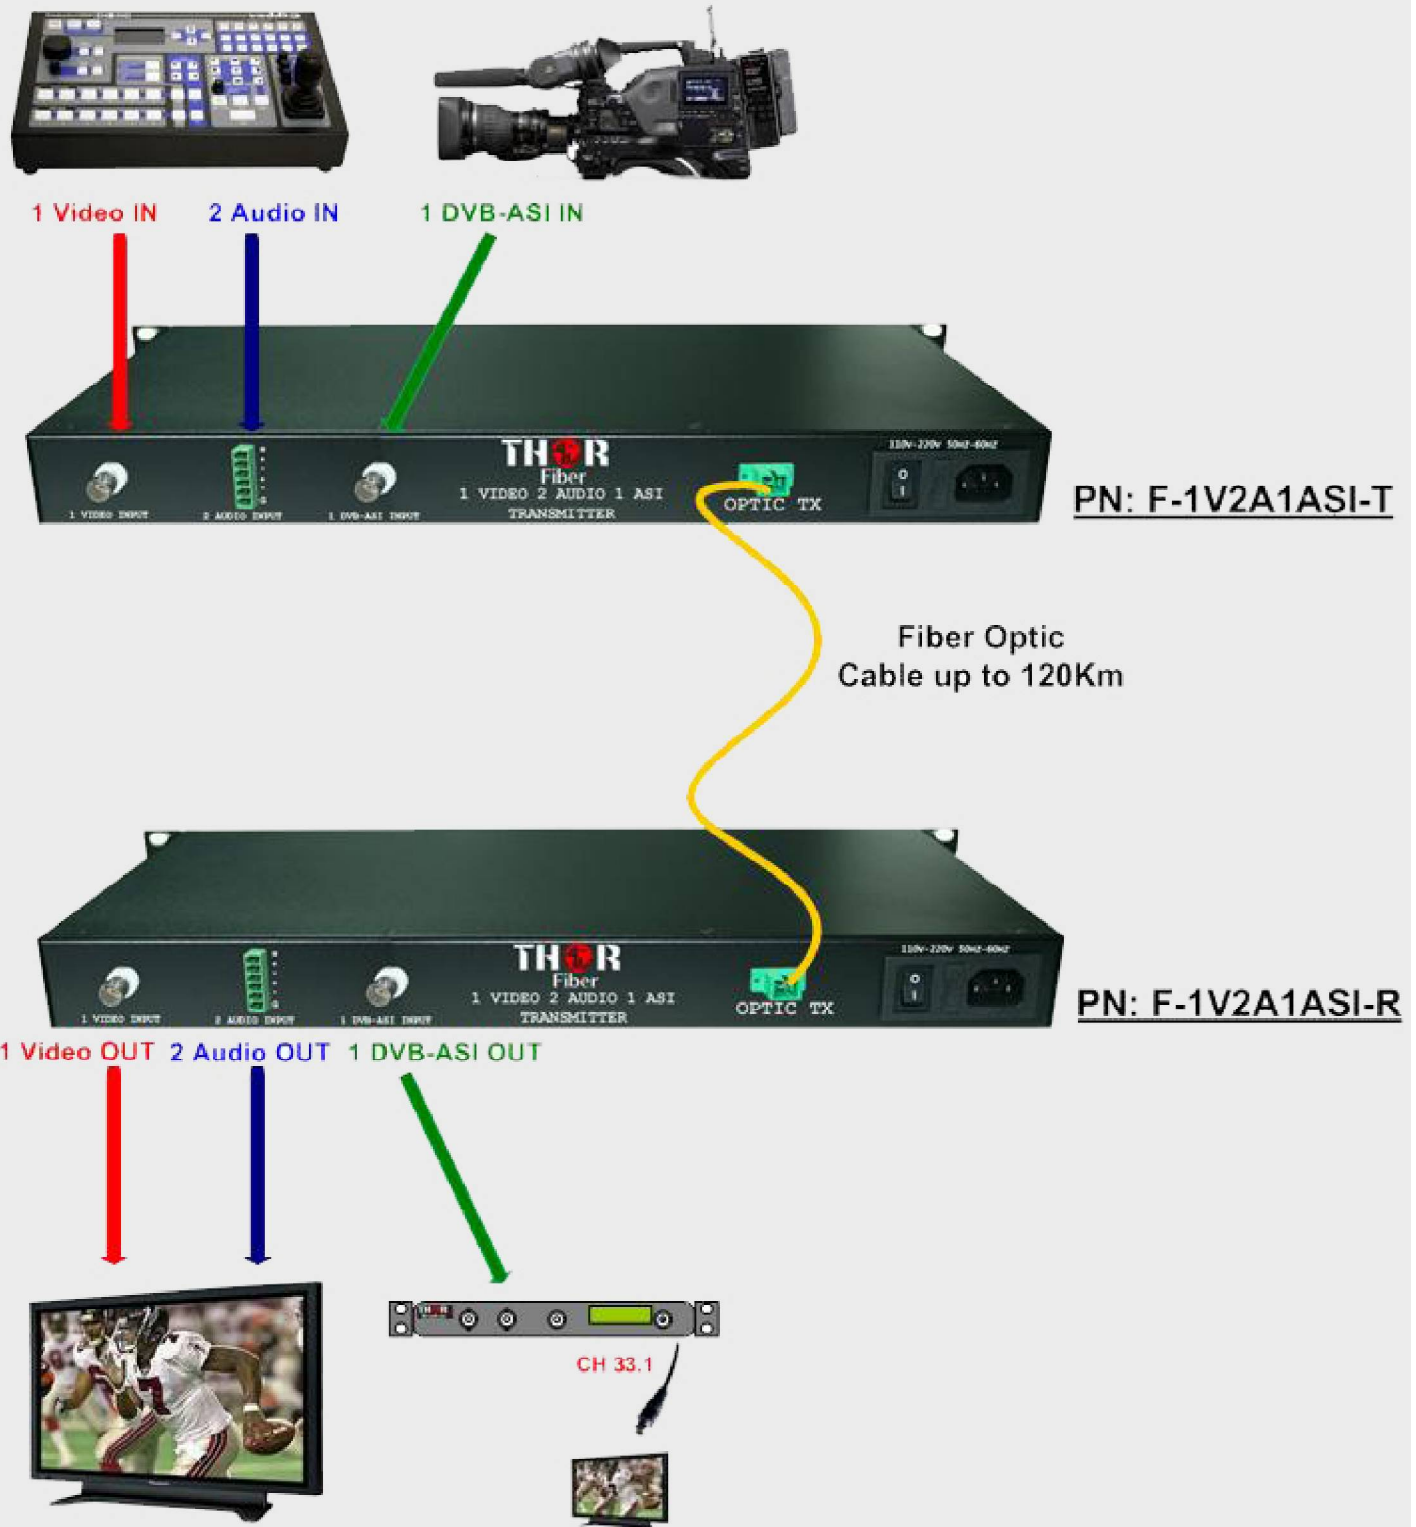

Standard Model Numbers

Model Number	Description
F-2V241ASI-Tx-MM	2 Video 4 Audio 1 DVB-ASI or SD-SDI Multimode Fiber Transmitter for 2km
F-2V4A1ASI-Rx-MM	2 Video 4 Audio 1 DVB-ASI or SD-SDI Multimode Fiber Reciever for 2km
F-2V4A1ASI-Tx-40	2 Video 4 Audio 1 DVB-ASI or SD-SDI Singlemode Fiber Transmitter for 40km
F-2V4A1ASI-Rx-40	2 Video 4 Audio 1 DVB-ASI or SD-SDI Singlemode Fiber Reciever for 40km
F-2V4A1ASI-Tx-80	2 Video 4 Audio 1 DVB-ASI or SD-SDI Singlemode Fiber Transmitter for 80km
F-2V4A1ASI-Rx-80	2 Video 4 Audio 1 DVB-ASI or SD-SDI Singlemode Fiber Reciever for 80km
F-2V4A1ASI-Tx-120	2 Video 4 Audio 1 DVB-ASI or SD-SDI Singlemode Fiber Transmitter for 120km
F-2V4A1ASI-Rx-120	2 Video 4 Audio 1 DVB-ASI or SD-SDI Singlemode Fiber Reciever for 120km

Product Specifications	
<i>*All Specifiactions Subject to Change Without Notice</i>	
NTSC, PAL, SECAM	
Channels	2 Baseband Video & 4 Audio
Serial Data	1 Ch DVB-ASI on BNC Connector or SDI or HDSDI or 3GSDI by request
Video Bandwidth	10Hzto6.5MHz
SNR/DP/dG	67 dB, < 1 deg / < 0.5%
Video Input	1Vp-p, 75 ohm
Audio	Terminal Block, 600 ohm
Dimensions	480mm x 225mm x 44mm
Environment	Operating temperatur: 0°C to 50°C Storage temperatur: -20°C to 70°C Operating humidity: 10% to 90%RH Storage humidity: 5% to 90%RH
Input Power	Voltage: 110/240VAuto-sense Internal Power

Optical:

Wavelength	1310nm - 40Km , 1550nm ,CWDM ,DWDM -80Km - 120Km
Tx Output Power	-5dBm
Rx Sensitivity	-30dBm
Saturation	No



SatelliteDish.com ®

(954) 941-8883