





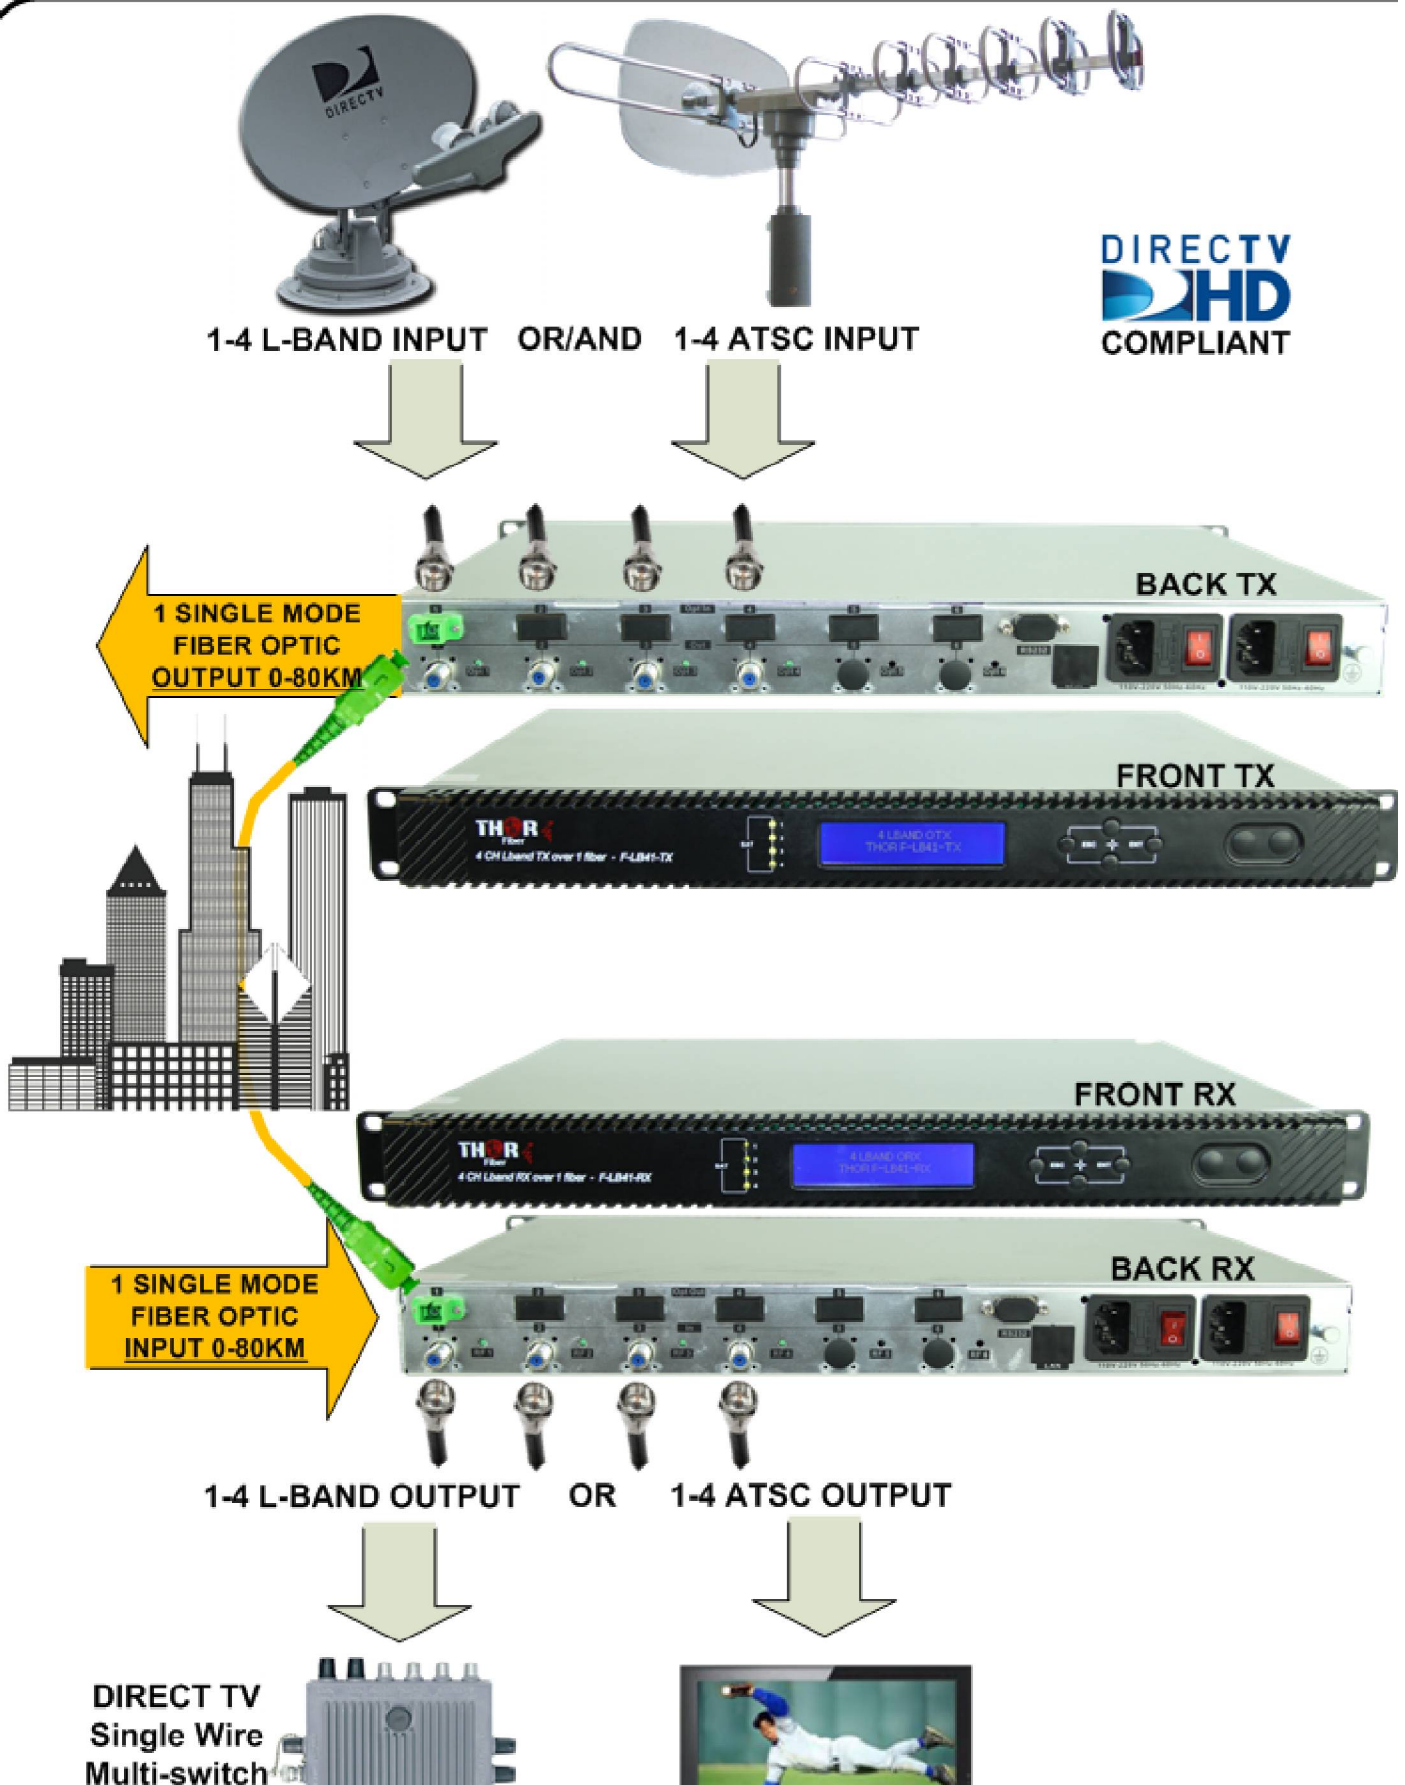

Product Specifications	
<i>*All Specifiactions Subject to Change Without Notice</i>	
RF Inputs	4x Type-F 75 Ohm
Frequency Range	950-2400 MHz
RF Input Power Level	(-25) - (-14)dBmV
Optical Wavelength	4x DWDM 100GHz 1528-1563nm
Optical Output Power	6.0 dBm (4mW) 8.0 dBm (6mW) Optional 10. dBm (10mW) Optional
Optical Output Ports	1x SC/APC
Laser Type	4x Feedback Controlled DFB type DWDM
RF Return Loss	12 dB
RF Link Gain	25 dB
Control Interface	RS-232 Serial SNMP Network Front Panel
Power Supply	110 / 220 VAC Auto Switching
Power Consumption	>50 W
Dimensions	482 x 268 x 44 mm
Weight	3.5 kg
Operating Temperature	0 - 65 C

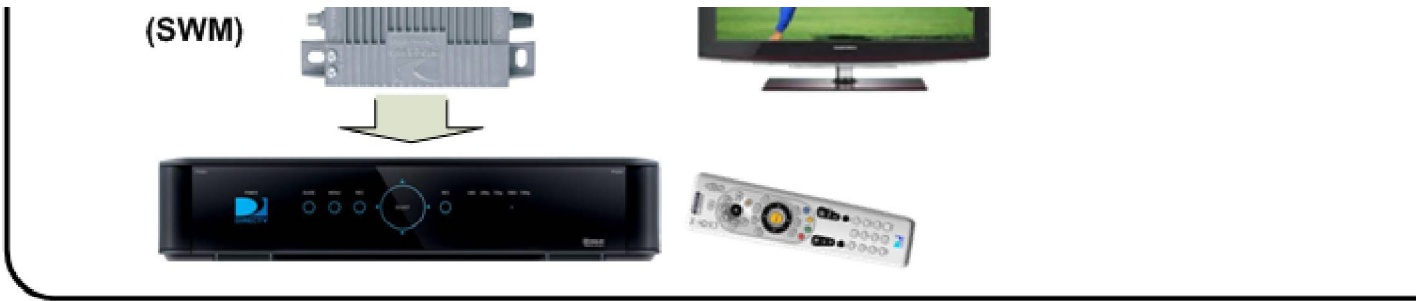