




## 10W Full 5.85-7.05 GHz C-Band BUC

### KEY FEATURES

- ◆ Output frequency 5.850-7.05 GHz
- ◆ Based on GaN technology which enables high efficiency, low power consumption and high reliability.
- ◆ Double- L.O. (manually switchable 4.9 & 5.5 GHz)
- ◆ Incomparable low power consumption (35W max)
- ◆ Advanced M&C interface - combined RS-232/485 + optional FSK
- ◆ Auto-ranging 15-60 VDC powering option
- ◆ Digital temperature compensation
- ◆ Power and lock status LED
- ◆ Field-exchangeable (F/N) IF connector
- ◆ Internal 10MHz high stability  $10^{-8}$  reference (optional)
- ◆ RoHS compliant
- ◆ Three-year warranty

### Mechanical Drawing

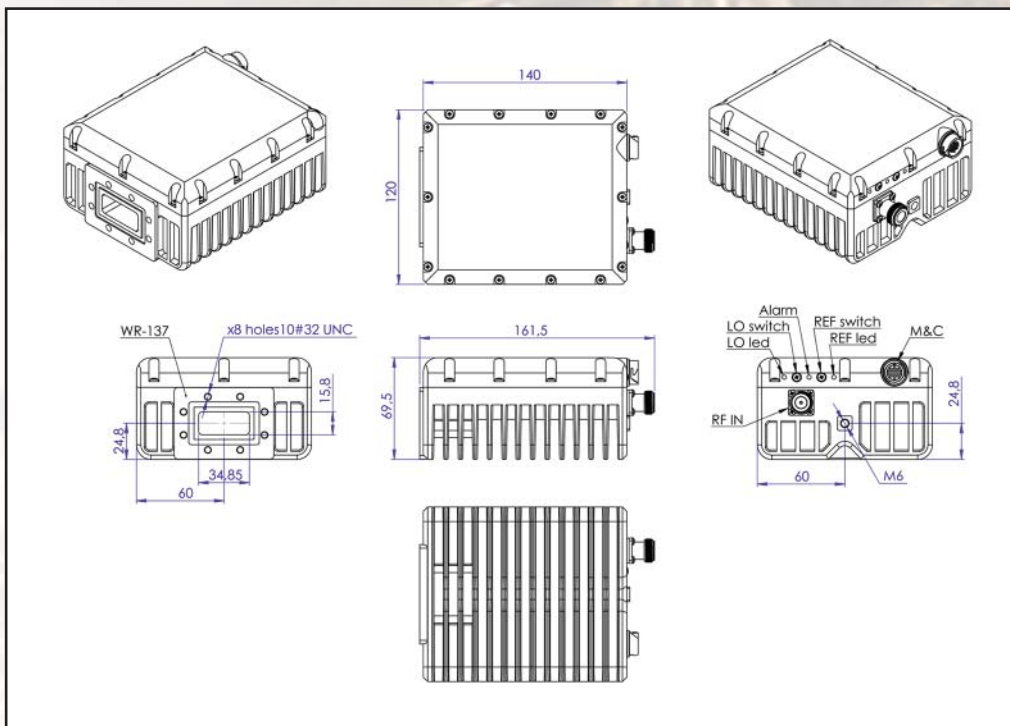

### ABE10XCM / ABE10XCMF



This smallest and lightest 10W L-To C-Band Block Up Converter is based on GaN technology. It is designed to be mounted on the feed horn. High power efficiency resulting in the low current ( $\leq 1.5$  amps @ 24 VDC). The unit covers all three C-Band sub-bands: Standard (5.850-6.425 GHz), Palapa (6.365-6.725 GHz) and Insat (6.725-7.05 GHz).



## 10W Full 5.85-7.05 GHz C-Band BUC

TECHNICAL SPECIFICATIONS	
RF frequency	5.850 to 7.05 GHz
Dual local oscillator	4.90 and 5.50 GHz
IF frequency	950 to 1,550 MHz
Output power	10W (+40 dBm min.)
IF connector	N-type or F-type (field-exchangeable)
Power supply : auto-ranging via IF connector	+15 VDC ~ +60 VDC, 35W max.
Output interface	CPR 137 G
Internal 10MHz high stability reference	10 <sup>-8</sup>
Gain	65 dB nominal
IMD3 (two tones)	-26 dBc max. 2 signal 5 MHz apart at P-LINEAR
L.O. leakage	-45 dBm max
Spurious	-50 dBc max
Spectral regrowth (QPSK at 1.5x and OQPSK at 1.0x symbol rate offset with 2dB back-off from rated output power)	-30 dBc
Requirement for external reference: frequency input power	<b>via IF cable</b> 10 MHz (sine-wave) -5 to +5 dBm @ input port
TX Gain variation	± 0.5 dB over 40 MHz
TX Gain stability over temperature range	± 1.8 dB over full band ± 1.5 dB typ., ± 1.8 dB max.
Phase noise  (Exceeds Intelsat's standard IESS308/309)	-53 dBc/Hz max. @ 10 Hz -63 dBc/Hz max. @ 100 Hz -73 dBc/Hz max. @ 1 KHz -83 dBc/Hz max. @ 10 KHz -93 dBc/Hz max @ 100 KHz -113 dBc/Hz max @ 1 MHz
Noise power density Transmit Receive	-66 dBm/Hz (max) -157 dBm/Hz (max)
FSK	Multiplexed on TX IFL, compatible with Compech and Paradigm
M&C Interface	RS-232 and RS-485
Noise figure	15 dB max
Input V.S.W.R.	2 : 1 max
Output V.S.W.R.	2 : 1 max.
Mute	Shut off the HPA if L.O. unlocked
Status LED RED GREEN YELLOW YELLOW blinking	Summary alarm All OK All OK standard L.O. 4.90 GHz All OK extended L.O. 5.50 GHz
Temperature range (ambient) operating storage	-40 deg C to +55 deg C -55 deg C to +85 deg C
Vibration and shock	Complies with MIL-STD-810E
Dimensions & housing	140 (L) x 120 (W) x 69.5 (H) mm 5.51" (L) x 4.72" (W) x 2.78" (H)
Weight	1.2 kg (2.6 lbs) max