


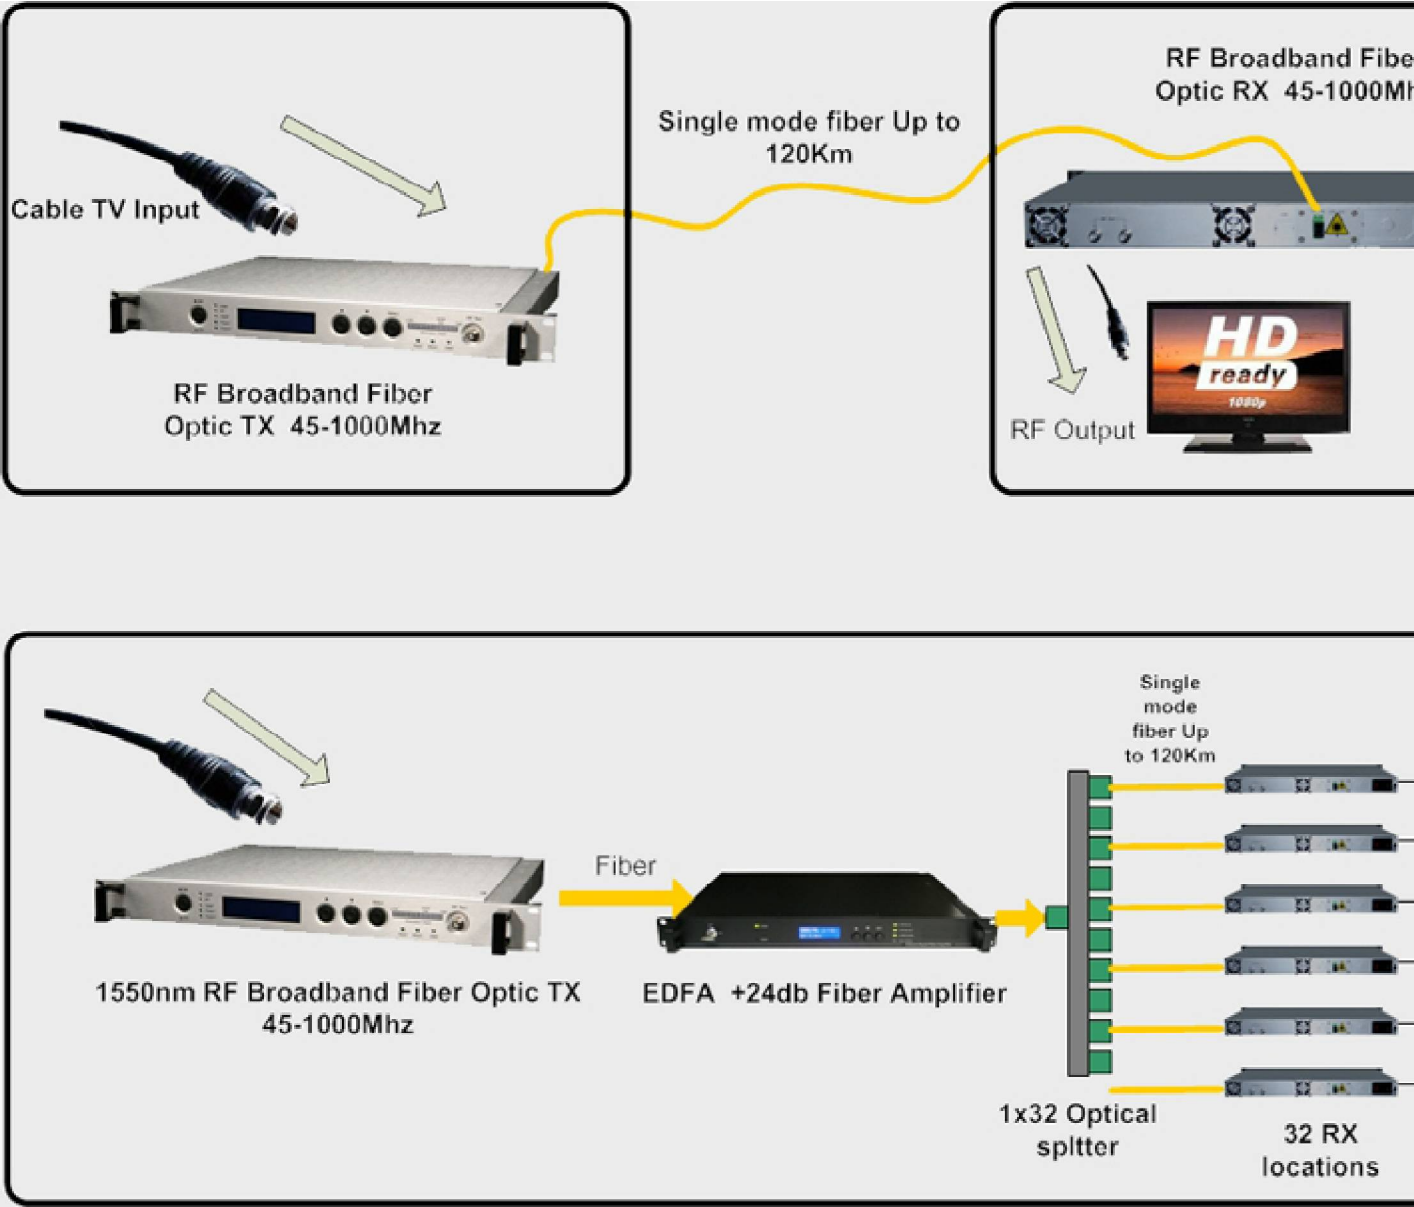

| Product Specifications                                |                |
|-------------------------------------------------------|----------------|
| * All Specifiactions Subject to Change Without Notice |                |
| Optical Features                                      |                |
| Wavelength                                            | 1310 - 1568 nm |
| linewidth                                             | <1 MHz FWHM    |
| Side Mode Suppression Ratio                           | > 45 dB SMSR   |
| Return Loss                                           | > 55 dB        |

|                         |                                          |
|-------------------------|------------------------------------------|
| Optical Fiber Connector | SC / APC standard FC / APC Optional      |
| <b>RF Features</b>      |                                          |
| Work Bandwidth          | 45 - 862 MHz                             |
| input Level             | 19 - 21 dBmV MGC                         |
| flatness                | <± 0.75 45 - 862 MHz                     |
| Return Loss             | > 16 dB                                  |
| input Impedance         | 75 Ohm RF Input                          |
| RF Interface            | F-Type or by request                     |
| <b>link Features</b>    |                                          |
| Transmit Channel        | PAL-D / 60th NTSC / 80CH                 |
| CNR                     | > 50 dB on 10Km optical fiber            |
| CTB                     | <-63 DB                                  |
| CSO                     | <-57 DB                                  |
| SBC restrain            | > 17 dBm                                 |
| <b>General Features</b> |                                          |
| Network Management      | RJ45 & RS232 Supports IE & SNMP          |
| Power Supply            | 90 ~ 265VAC -48VDC optional (30 ~ 60VDC) |
| Power Consumption       | <50                                      |
| Working Temp            | -5 - 65?                                 |
| Storage Temp            | -40 - 85?                                |
| Operating humidity      | 5 - 95%                                  |
| size                    | 19 × 10 × 1.75 (W) x (D) x (H)           |