


China Starwin 7.3M EARTH STATION ANTENNA DATASHEET

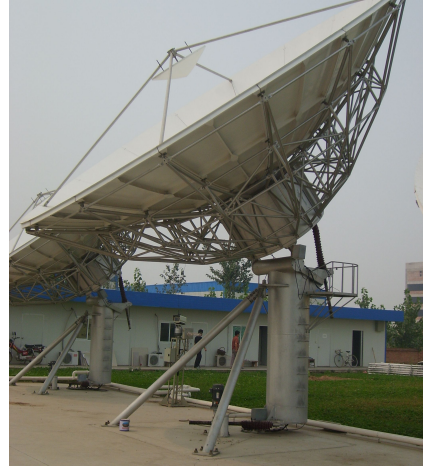

Performance Strength

- *C,Ku, multi band Available , meeting FCC and ITU-RS-580 requirements
- *High quality aluminum reflector panels and galvanized steel backup structure
- *Self-aligning aluminum antenna reflector-no field alignment
- *Galvanized steel elevation over azimuth pedestal
- *Fixed foundation and Non penetrating foundation optional for wider choice
- *Survives 125 mph winds in any position and High wind configuration optional

Description

China Starwin 7.3m antenna delivers exceptional high performance for transmit/receive application in C ,Ku, ka, X band in Tx/Rx 2 ports, 4 ports or Rx 1 port with high gain ,low noise and low microwave interference.

China Starwin 7.3m antenna offers a fine reflector design with a stretch formed double contoured panels, strong back struts and hub fore ease of field alignment. The standard designed azimuth over elevation pedestal provides a cost-effective solution for ground or roof installation with high stiffness and stability , full orbital arc coverage and fine drive performance, and ensures the pointing and tracking accuracy .

The electrical performance is compliant with FCC and ITU-RS-580 sidelobe specifications and Intelsat ,Eutelsat, INMARSAT, ASIASEAT,APT and CHINASAT, etc requirement.

Key features

- *Meets or exceeds CCIR 580 and INTELSAT Requirements
- *High G/T, excellent pattern characteristic

- * Precision compression molded offset antenna
- * CP/LP switchable feed
- * Hot dip zinc steel pedestal, hub & back struts
- * Galvanized stainless steel fasteners
- * Foundation hardware kit provided
- * Package suitable for air, ocean land transportation

Antenna Accessory

- * Limit Switches
- * Foundation hardware Kit
- * Grounding Kits Cable –Mounting kits
- * Cable mounting kits
- * ODU Support Kits
- * Factory Feed System Testing and Documentation
- * Ocean /Air/land Transport Packing

Options

- * L, S, C, X, Ku and DBS-band feed configurations
- * 800MHz bandwidth is available
- * Two or Four ports -Tx/Rx port in linear or circular polarized feeds
- * motorization kits
- * Feed blower or deicing with automatic controls
- * Lightning Rod Kits
- * Non-penetrating mount
- * Antenna control & tracking system for step track, program track, inclined orbit track
- * Integrated LNB or LNA systems
- * HPAs, converters and M&C systems
- * Integrated LNB or LNA systems
- * HPAs, converters and M&C systems
- * Turnkey installation & testing

Continue to next page

Electrical, Mechanical, Environmental Specification

Electrical Specification

Type		SW73C		SW73K	
Operating Frequency, GHz		C band		Ku band	
		Receive	Transmit	Receive	Transmit
		3.4~4.2	5.85~6.725	10.95~12.75	13.75~14.5
Gain, Mid-band, dBi		48	51.6	57.5	58.9
Polarization		Linear /circular		Linear	
XPD(on Axis), dB		35	35	35	35
XPD across 1dB Beam Width, dB		33	33	33	33
Axial Ratio (Circular-Polarized)	2-Port Feed 4-Port Feed	1.30/1.06	1.09/1.06		
VSWR		1.25	1.25	1.25	1.25
Antenna Noise Temperature 2-port feed					
10° Elevation		43°K		66°K	
30° Elevation		32°K		52°K	
50° Elevation		29°K		47°K	
Typical G/T (EL>10° , 2-port)		29.3 dB / K (30°LNA)		36.1 dB / K (70°LNA)	
-3 dB Beam Width, Mid-band		0.72°	0.47°	0.23°	0.20°
Tx. Power Capability, KW			5		2
Feed Interface		CPR—229G	CPR—137G	WR-75	WR-75
Feed Insertion Loss, dB		0.2	0.2	0.25	0.2
Isolation, Tx to Rx, dB		90		85	
Side lobe		CCIR580-4			

Mechanical Specification

Antenna Diameter		7.3m
Antenna Type		Cass grain
Surface Accuracy (RMS)		≤0.5mm
Antenna Pointing Range	Azimuth	±85°, 0°-360° continuous optional
	Elevation	0°~90°(Continuous)
	Polarization	±90°(Continuous)

Drive Mode		Manual or Motorized
Motor Drive System	Azimuth Travel Rate	0.11°/S(0.03°/S)
	Elevation Travel Rate	0.17°/S(0.04°/S)
	Polarization Travel Rate	1 ° / s
Antenna reflector Material		Aluminum Alloy
Finish of steel parts		Hot dipped Zinc

Environmental Specification

Operational Wind	72km/h gusting to 97km/h
Survival Wind	216km/h
Temperature	-40°~+60°
Relative Humidity	100%
Solar Radiation	1135Kcal/h/m ²
Seismic(Survival)	0.3g(H), 0.15g(V)
Ice Loading	13mm Operational; 25mm Survival

Technical specifications of DBS band antenna (7,3m)

PARAMETER	Specification data	Notes
ELECTRICAL		
Tx frequency band (GHz)	17,300- 18,400	
Rx frequency band (GHz)	10,700- 12,750	
Tx gain (dBi)	>59,5	At mid-band
Rx gain (dBi)	>56,5	At mid-band
Feed assembly	Linear 4 port feed	
Off axis emissions	ITU RS.524-5	
G/T (dB/K)	>36	At 20° elevation with 65K LNB/ 11,725GHz
Crosspol isolation	> 35 dB Tx & Rx	
Sidelobes	Meets Intelsat, FCC 25.209, ITU RS.580-5	

Port to port isolation (min)	Tx to Rx 85dB RxtoTx70dB	
Antenna noise temp	10° elevation 60K 20° elevation 50K 40° elevation 45K	
Pattern beamwidth (deg)	Tx 0,18 Rx 0,23	-3dB at mid-band
VSWR	Better than 1.3:1	
Power handling per Tx port	1KWattsmin	
Feed interface	Tx WR-62	
	Rx WR-75	
MECHANICAL		
Antenna type	Cassegrain with corrugated horn	
Antenna travel	Elevation 0° - 90°	Continuous
	Azimuth 180°	Max 2 segments
	Polarization ±90°	
Mount type	Elevation over azimuth	
Antenna travel rate (min values)	Az 0,06° /sec El 0,03° /sec Pol 1,5°/sec	

	• Feed rainblower • Aircraft warning lights • Lighting kit • Hub closeout kit • Ladder & platform • Dehydrator • Tx couplers	Automatic
ENVIRONMENTAL		
Operational temperature	-15° to +50° C	
Survival temperature	-30° to +60° C	
Relative humidity	0 to 100%	
Rain	10cm/h	
Snow	5mm/h	