


## 8 Channel NVR Complete Kit with Four IP 1.3 Megapixel Cameras & 4 PoE Ports

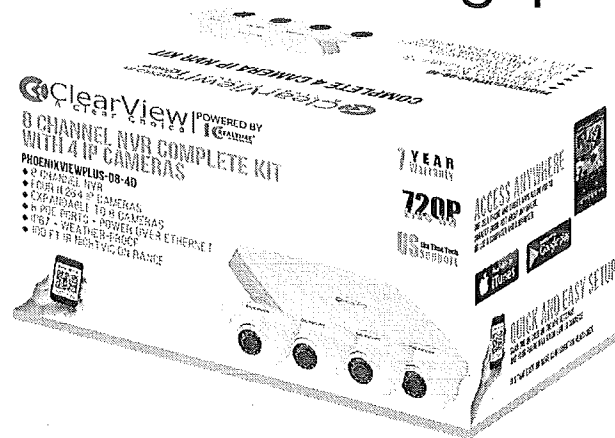

### OVERVIEW

- 8 Channel NVR
- Four 720P H.264 IP Cameras
- Expandable to 8 Cameras
- 8 PoE Ports
- IP67 - Weather-Proof
- PoE - Power Over Ethernet
- 100 ft IR NightVision Range
- Includes 1 TB Hard Drive

Control4



### PhoenixView-08-4D

Main Processor: ARM Dual-core embedded processor

Operating System: Embedded LINUX

Display Interface: 1 HDMI, 1 VGA

Resolution: 1920x1080, 1280x1024, 1280x720, 1024x768

Multi-screen Display: 1/4/8/9

OSD: Title, Time, Video loss, Camera lock, Motion detection, Recording

Trigger Events: Recording, PTZ, Tour, Video Push, Snapshot, Buzzer and Screen Tips

Video Detection: Motion Detection, MD Zones: 396 (22 x 18), Video Loss and Tampering

Sync Playback: 1/4/9

Search Mode: Time /Date, MD and Exact Search to THE second

Playback Function: Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom

Backup Mode: USB Device/Network/Internal SATA burner

Internal HDD: 1 SATA III Port, up to 6TB capacity for each HDD

USB: 2 ports (2 Rear USB2.0)

IP Camera Input: 8 Channel

Two-way Talk: 1 Channel Input, 1 Channel Output, RCA

Recording Compression: H.264+/H.264

Resolution: 4Mp/3Mp/1080P/ 720P/ D1&etc.

Record Rate: 80Mbps

Bit Rate: 16kbps~20Mbps for per channel

Record Mode: Manual, Schedule(Regular(Continuous), MD, Stop

Record Interval: 1~120 min (default: 60 min), Pre-record: 1~30 sec,

Post-record: 10~300 sec

Network Interface: 1 RJ-45 port (10/100Mbps)

Ethernet Port: 1 Independent 100Mbps Ethernet Port

PoE: 8 ports 80wat total (IEEE802.3at/af)

Network Function: HTTP, TCP/IP, IPv4/IPv6, RTSP, UDP, NTP, DHCP, DNS, IP Filter, DDNS, IP Search(Support CV IP camera, DVR, NVS and etc.), Easy4ip

Smart Phone: iPhone, iPad, Android

Interoperability: ONVIF 2.4, CGI Conformant

Power Supply: Single, DC48V/2A

Power Consumption: NVR: <4.5W (without HDD)

Operating Conditions: -10°C ~ +55°C (+14°F ~ +131°F), 86 ~ 106kpa

Storage Conditions: -20°C ~ +70°C, 0 ~ 90% RH

Dimensions(WxDxH): Smart 1U, 10.6" x 8.1" x 1.8"

### IPD-70 IP 1.3 MEGA-PIXEL IR INFRARED DOME CAMERA SPECS:

- 1/3" 720P 1.3 Megapixel progressive scan CMOS
- H.264 / MJPEG dual-stream encoding
- Max 30fps @ 1.3 Megapixel (1280x960)
- Day/Night(ICR), 3DNR, AWB, AGC, BLC, DWDR
- 3.6mm Angle Lens
- IP67 - Weather-Proof
- PoE - Power Over Ethernet
- 100 ft Ir nightvision Range




# ClearView

A Clear Choice

POWERED BY  
IC REALTIME<sup>®</sup>  
Security Solutions

## PantherView HD-AVS 16 Channel DVR Kit with 8 HD Dome Cameras - 165ft Night Vision

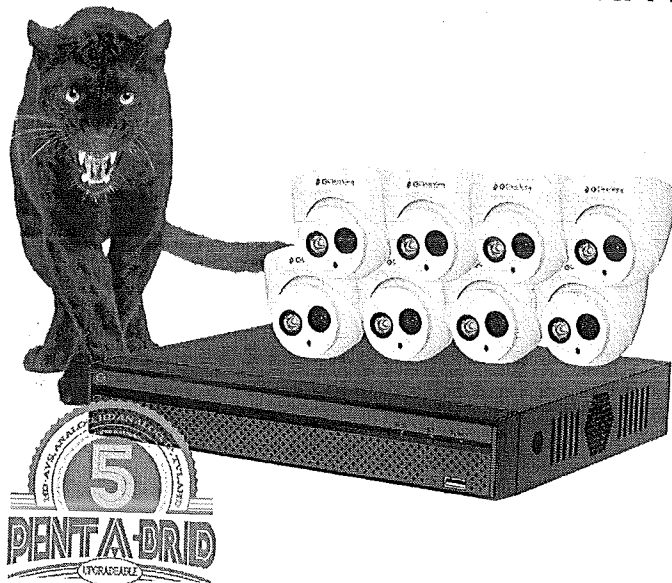

### OVERVIEW

- 16 Channel 1080P Digital Video Recorder
- Up to 8 Channels IP at 5 MegaPixel
- 96Mbps IP Incoming Bandwidth
- Penta-brid with HD-AVS, Analog, HD Analog, IP, TVI
- "Works with five most popular security cameras"
- H.265/H.264 Dual-stream video compression
- Embedded Linux processor
- Smart Search and Intelligent Video System
- 8 qty 2.0 MP HD-AVS IR Eyeball Camera - HD2-LDR
- 165ft IR Night Vision Cameras
- All metal camera bracket and housing
- Includes: 2 TB Drive supports up to 6TB

Two-way Talk: 1 Channel Input, 1 Channel Output, RCA  
 Recording Compression: H.265/H.264  
 Resolution: 1080P, 720P, 960H, D1, HD1, BCIF, CIF, QCIF  
 Record Rate: Main stream: 1080P(1~15fps) 1080N / 720P / 960H / D1 / HD1 / BCIF / CIF / QCIF (1~25/30fps)  
 Sub stream: D1 / CIF / QCIF(1~25/30fps)  
 Bit Rate: 32Kbps ~ 6144Kbps Per Channel  
 Record Mode: Manual, Schedule (Regular, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering), Alarm, Stop  
 Record Interval: 1~120 min, Pre-record: 1~30 sec, Post-record: 10~300 sec  
 Network Interface: 1 RJ-45 Port (1000M)  
 Network Function: HTTP, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, IP Search (Support ClearView IP Camera, DVR, NVS, etc.)  
 Smart Phone: iPhone, iPad, Android  
 Interoperability: ONVIF 2.4.1, CGI Conformant  
 Power Supply: DC12V/2A  
 Power Consumption: <10W (Without HDD)  
 Operating Conditions: -10°C ~ +55°C (+14°F ~ +131°F), 86 ~ 106kpa  
 Storage Conditions: 0°C ~ +50°C (+32°F ~ +122°F), 0 ~ 90% RH  
 Dimensions: 10.2" x 9.3" x 1.9"  
 Net Weight: 1.1lb (without HDD)

### PantherView5-16-08D

Main Processor: Embedded Linux Processor  
 Display Interface: 1 HDMI, 1 VGA  
 Resolution: 1920 x 1080, 1280 x 1024, 1280 x 720, 1024 x 768  
 Multi-screen Display: 1/4/8/9/16/25  
 OSD: Camera title, Time, Video loss, Camera lock, Motion detection, Recording  
 Trigger Events: Recording, PTZ, Tour, Alarm Out, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips  
 Video Detection: Motion Detection, MD Zones: 396 (22 x 18), Video Loss and Camera Blank  
 Sync Playback: 1/4/9/16  
 Search Mode: Time /Date, Alarm, MD and Exact Search (to second)  
 Playback Function: Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom  
 Backup Mode: USB Device/Network  
 Internal HDD: 1 SATA Ports, up to 6TB capacity for each disk  
 HDD Mode: Single  
 USB: 2 USB Ports (1 USB 2.0, 1 USB 3.0)  
 RS485: 1 Port, for PTZ Control  
 Third-party Support: ClearView, IC Realtime, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek, and more  
 HD-AVS Camera Input: 16 Channel  
 IP Camera Input: 8 Channel, each channel up to 5MP  
 Audio In/Out: 1/1

