



## Overview

Advantech Wireless A-Line Series antennas are designed and manufactured in batches 3.7-meter aluminum reflector antenna for VSAT applications in C band (Model C37T) and Ku band (Model K37T).

The A-Line 3.7M antenna adopts Dual Shaped Compact Cassegrain precision-formed reflector mounted on a Az.over El. pedestal providing necessary stiffness and pointing accuracy required in C and Ku band operation. It is provided with a Rx/Tx (2 ports) feed with corrugated horn and OMT and is of optimized R.F. specification, operates in circular or linear polarization selectable manually and meets any requirements of customers for particular applications.

The A-Line 3.7M antenna meets the regulations of CCIR 580-4 and have been type approved by ASIAsat and INTELSAT. The 3.7M antenna can enter ASIAsat-2 and INTELSAT Network without the need of certification test after installation on sites.

# A-Line Series 3.7m ANTENNA



## Antenna Specifications

R.F Specifications				
Cassegrain Antenna with 2 port feed	C-Band		Ku-Band	
	Receive	Transmit	Receive	Transmit
Frequency in GHz*	3.625-4.200	5.850-6.425	12.20-12.75	14.0-14.5
Gain	42.1	45.3	51.2	52.6
Antenna Noise Temp.				
10°Elevation	37K		51K	
20°Elevation	32K		44K	
40°Elevation	27K		38K	
Typical G/T at 20°EI	23.5dB/K with 35K LNA		30.3dB/k with 70K LNA	
Sidelobe Pattern	First sidelobe level $\leq$ -14dB Beyond first sidelobe meet IESS(Intelsat) or CCIR 580-4 Recommendation			
Cross Pol. Discrimination	35dB (On axis) 30dB (within 1 dB Beamwidth)			
VSWR	1.3:1 (LP) 1.25:1 (CP)	1.3:1 (LP) 1.25:1 (CP)	1.25:1	1.25:1
-3 dB beamwidth	1.29°	0.83°	0.44°	0.37°
Axial Ratio (CP only)	1.5dB	.75dB		
Feed Insertion or Ohmic Loss	0.20dB	0.10dB	0.30dB	0.25dB
Power Handling Capability	3 Kw		1 Kw	
Port to Port Isolation	80dB		85dB	
Feed Interfaces	CPR-229F	CPR-137G	WR75	WR75
<p>NOTE: All data are tested at the feed output port and input port .</p> <p>* The frequency range are Rx: 3.4-3.7GHz/Tx: 6.424-6.725GHz or Rx:3.4-4.2GHz /Tx:5.85-6.650GHz optional.</p> <p>** The other operational frequency bands of VSAT antennas can be of 10.95- 11.7GHz or 11.7-12.2GHz, even extended as 10.95-12.75GHz. They are available with an option for customers when order.</p>				
Mechanical Specifications				
Azimuth Travel	120°continuous or +/-60° in total			
Elevation Range	0-90°			
Reflector	Aluminium			
Backup Structure	Steel			
Pedestal Structure	Steel			
Finish				
Reflector Surface	Aluminium panels with heat-diffusing white paint			
Pedestal and Steel Structure	Sand blast and hot spray galvanized and two times paint			
Foundation	5.0m x 5.0m			
Antenna Drive Mode	Manual (Motorized drive optional)			
Options				
	Motorized drive			

# A-Line Series 3.7m ANTENNA

## Antenna Specifications

Physical	
Ambient Temperature	-40°C to 60°C
Operational Wind	50km/h gusts to 97km/h
Survival Wind	200km/h, 80m/s optional
Rain	Up to 100mm/h
Relative Humidity	Up to 100%
Solar Radiation	1000 kcal/M <sup>2</sup> /h
Radial Ice (Survival)	25mm on all surface or 13mm on all surface with 130km/h wind gusts
Shock and Vibration	As encountered during shipment by commercial air, sea or truck
Corrosive atmosphere	As encountered in coastal regions and/or heavily industrialized areas
Seismic(Survival)	0.3G's horizontal 0.1G's vertical
Shipping Weight	1500kg
Shipping Volume	8.2m <sup>3</sup>

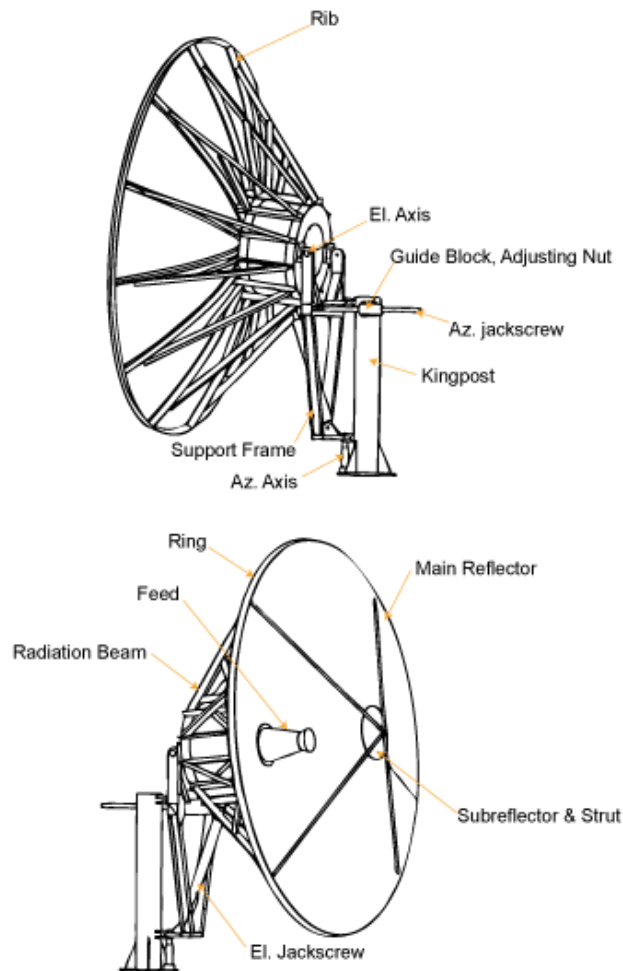


Diagram of 3.7m Ku-Band Antenna

### NORTH AMERICA USA

Tel: +1 703 659 9796  
Fax: +1 703 635 2212  
info.usa@advantechwireless.com

### CANADA

Tel: +1 514 420 0045  
Fax: +1 514 420 0073  
info.canada@advantechwireless.com

### EUROPE UNITED KINGDOM

Tel: +44 1480 357 600  
Fax: +44 1480 357 601  
info.uk@advantechwireless.com

### RUSSIA & CIS

Tel: +7 495 971 59 18  
info.russia@advantechwireless.com

### INDIA

Tel: +91 33 2415 5922  
info.india@advantechwireless.com

### SOUTH AMERICA

Tel: +1 514 420 0045  
Fax: +1 514 420 0073  
info.latam@advantechwireless.com

### BRAZIL

Tel: +55 11 3054 5701  
Fax: +55 11 3054 5701  
info.brazil@advantechwireless.com

An ISO 9001 : 2008 Company



Ref.: PB-AW-ALINE-3.7m-13150