



**µBUC X-Band or Ku-Band Block Up Converter**

## Description

Teledyne Paradise Datacom's µBUC is a Block Up Converter available in X- and Ku-Band. The module is specifically designed for highly mobile commercial and military satellite communication applications. The µBUC is ideal for use in any Fly-away or Manpack application where miniature form factor and light weight are a requirement.

The converter locks to a 10 MHz external reference signal of -10 dBm to +5 dBm. The external reference must be diplexed on the L-Band Input Connector.

The unit requires a customer designed heatsink.

## FEATURES

- Ku-Band Output:  
10, 20 and 25 W
- X-Band Output:  
10, 20 and 25 W
- Multiple reference frequency operation
- L-Band Input
- Miniature and light weight
- Ideal for fly-away and manpack applications

**BUY NOW**

# Ku- & X-Band Micro Block Up Converter


## Ku-Band Specifications

PARAMETER	NOTES	LIMITS	UNITS
Input Frequency	Option 950-1700	950 - 1450	MHz
Output Frequency	Option 13.75-14.50	14.0 - 14.5	GHz
LO Frequency	At 14.0-14.5 GHz	13.05	GHz
	At 13.75-14.50 GHz	12.80	GHz
Gain		60	dB
Gain Flatness	full band	± 2.0	dB
Gain Slope	per 40 MHz	± 0.5	dB
Gain variation vs. Temperature	-30 to +60 °C baseplate	0 ± 2.0	dB
Output Power		$P_{sat} / P_{1dB}$	
	10W	40.5 / 40.0	dBm
	20W	43.0 / 42.0	dBm
	25W	44.0 / 43.0	dBm
Intermodulation Distortion	3dB back off relative to $P_{1dB}$	-25	dBc
Spurious	In-Band Signal Related	-50	dBc
	Close to Carrier Spurious ( $\leq 20$ MHz)	-50	dBc
	Local Oscillator	-30	dBm
Harmonics	2 <sup>nd</sup> harmonic measured at $P_{1dB}$	-40	dBc
Output Spectrum	Low side Local Oscillator	Non Inverted	
Input Return Loss		12	dB
Output Return Loss		12	dB
Noise Figure		15	dB
Group Delay (per 40 MHz segment)	Linear	0.01	ns/MHz
	Parabolic	0.003	ns/MHz <sup>2</sup>
	Ripple	1.0	ns p-p
Reference Input Frequency	Diplexed on L-Band Input Connector	10	MHz
Reference Input Power	Diplexed on L-Band Input Connector	-10 to +5	dBm
Input Voltage	+48 VDC nominal	+36 to +60	VDC
	+24 VDC nominal	+24 ±10%	VDC
Input Power @ $P_{1dB}$	10W @ 48 VDC	2.7	A
	10W @ 24 VDC	6.3	A
	20W @ 48 VDC	4.2	A
	20W @ 24 VDC	9.2	A
	25W @ 48 VDC	4.8	A
	25W @ 24 VDC	10.4	A
Monitor & Control Functions	Tx Inhibit (GND for Unmute) Temperature Fault Summary Fault		
Alarm Output	Open Collector Output (requires external pull-up)	Open = Fault	
Weight Dimensions	L x W x H	4.5 (2.0) 7.98 x 4.0 x 2.25 (203.2 x 101.6 x 57.1)	lb. (kg) in (mm)
Heatsink (must meet thermal resistance specification)	10W µBUC	0.230	°C/W
	20W µBUC	0.150	°C/W
	25W µBUC	0.125	°C/W

# Ku- & X-Band Micro Block Up Converter

## X-Band Specifications

PARAMETER	NOTES	LIMITS	UNITS
Input Frequency		950 - 1450	MHz
Output Frequency		7.90 - 8.40	GHz
LO Frequency		6.95	GHz
Gain		60	dB
Gain Flatness	full band	± 2.0	dB
Gain Slope	per 40 MHz	± 0.5	dB
Gain variation vs. Temperature	-40 to +60 °C baseplate	0 ± 2.0	dB
Output Power	10W 20W 25W	$P_{sat} / P_{1dB}$ 40.5 / 40.0 43.5 / 43.0 44.5 / 44.0	dBm dBm dBm
Intermodulation Distortion	3dB back off relative to $P_{1dB}$	-25	dBc
Spurious	In-Band Signal Related Close to Carrier Spurious (≤ 20 MHz) Local Oscillator	-50 -50 -30	dBc dBc dBm
Harmonics	2 <sup>nd</sup> harmonic measured at $P_{1dB}$	-40	dBc
Output Spectrum	Low side Local Oscillator	Non Inverted	
Input Return Loss		12	dB
Output Return Loss		12	dB
Noise Figure		15	dB
Group Delay (per 40 MHz segment)	Linear Parabolic Ripple	0.01 0.003 1.0	ns/MHz ns/MHz <sup>2</sup> ns p-p
Reference Input Frequency	Diplexed on L-Band Input Connector	10	MHz
Reference Input Power	Diplexed on L-Band Input Connector	-10 to +5	dBm
Input Voltage	+48 VDC nominal +24 VDC nominal	+36 to +60 +24 ±10%	VDC VDC
Input Power @ $P_{1dB}$	10W @ 48 VDC 10W @ 24 VDC 20W @ 48 VDC 20W @ 24 VDC 25W @ 48 VDC 25W @ 24 VDC	2.0 4.6 3.2 6.0 3.7 8.2	A A A A A A
Monitor & Control Functions	Tx Inhibit (GND for Unmute) Temperature Fault Summary Fault		
Alarm Output	Open Collector Output (requires external pull-up)	Open = Fault	
Weight Dimensions	L x W x H	4.5 (2.0) 7.98 x 4.0 x 2.25 (203.2 x 101.6 x 57.1)	lb. (kg) in (mm)
Heatsink (must meet thermal resistance specification)	10W µBUC 20W µBUC 25W µBUC	0.275 0.230 0.150	°C/W °C/W °C/W

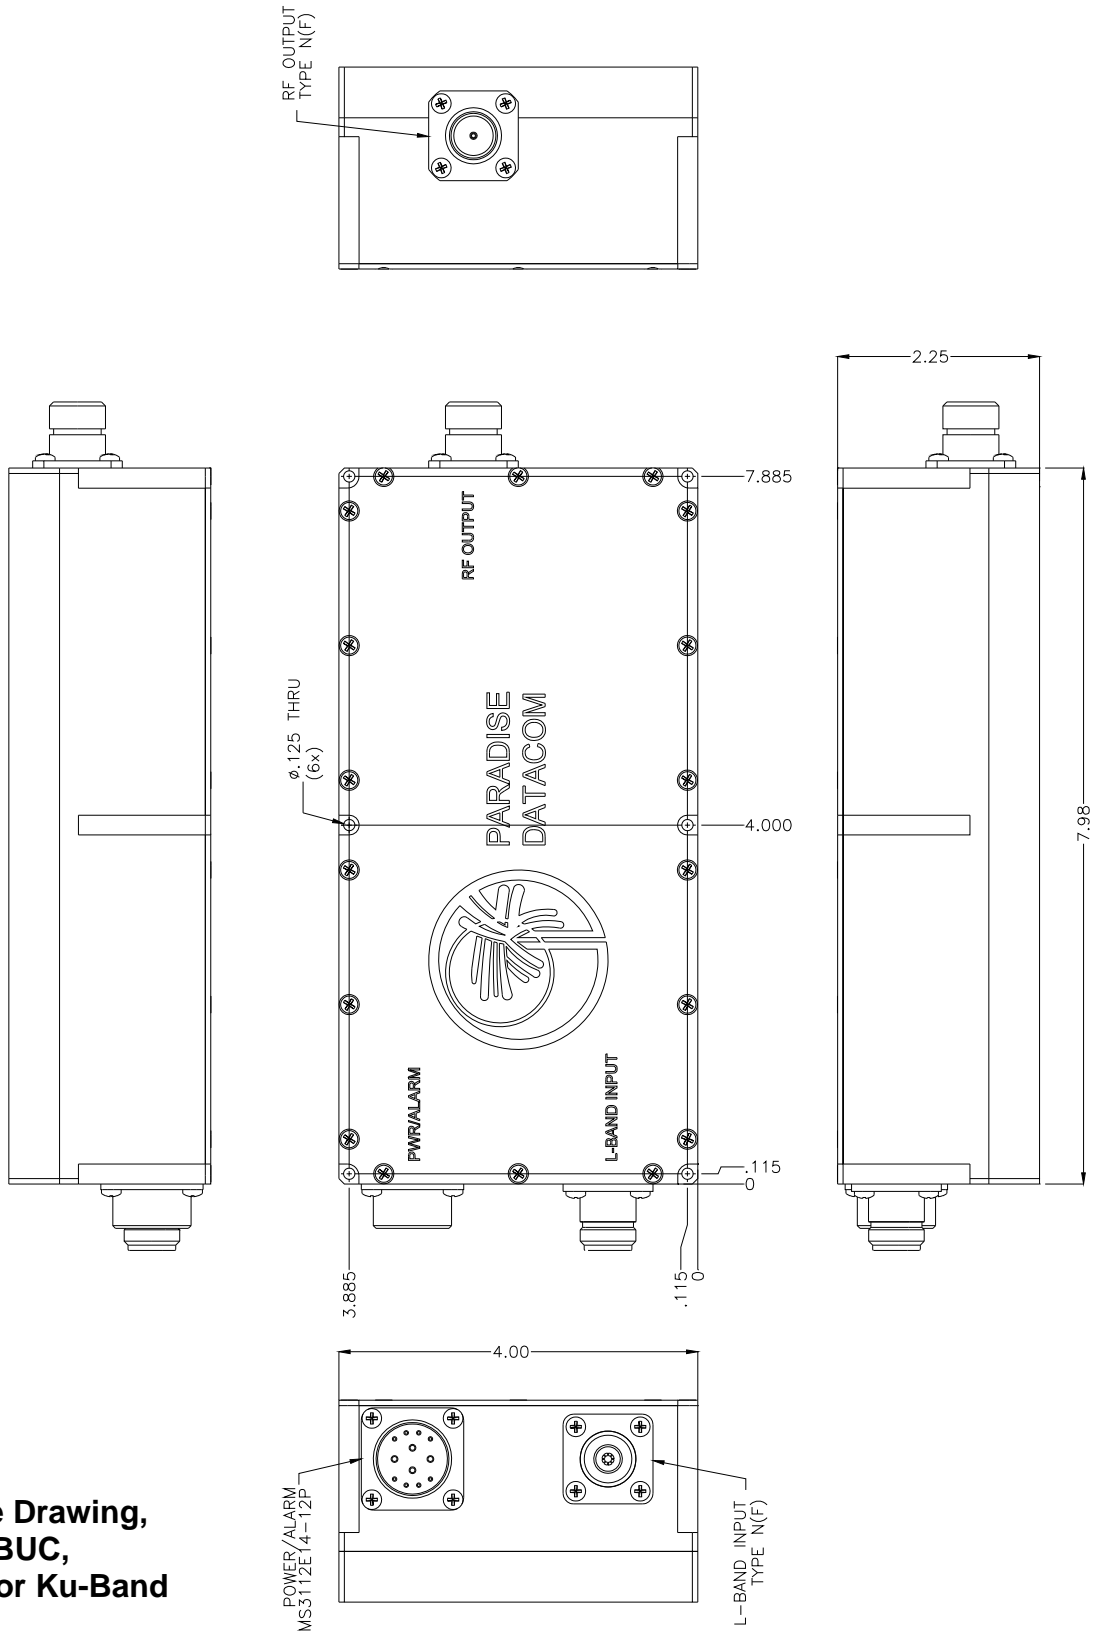


**Outline Drawing,  
 μBUC,  
 X-Band or Ku-Band**

**Local Oscillator Phase Noise**

Offset	Guaranteed Max.	X-Band or Ku-Band (Typical)	Units
10 Hz	-30	-60	dBc/Hz
100 Hz	-60	-75	dBc/Hz
1 KHz	-70	-75	dBc/Hz
10 KHz	-80	-100	dBc/Hz
100 KHz	-90	-110	dBc/Hz
1 MHz	-90	-122	dBc/Hz

**Part Number Configuration**

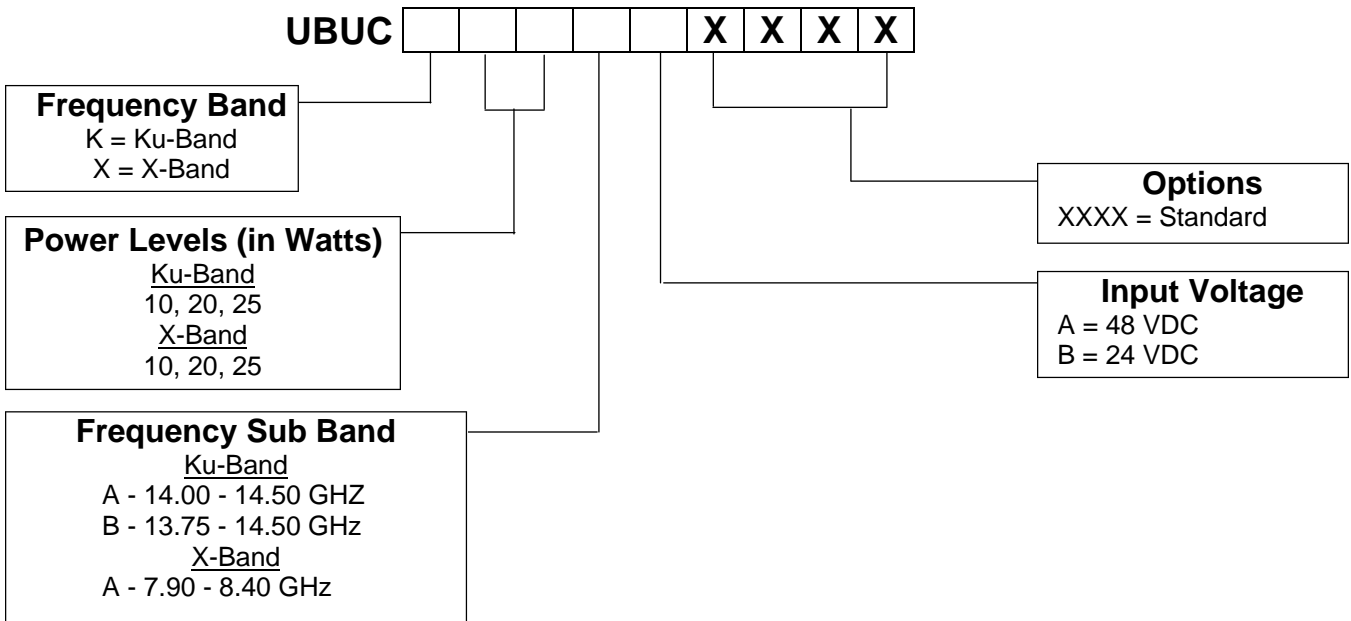

Post Office Box 1639  
 101 Eagle Road - Building #7  
 Avon, Colorado 81620 USA  
 970 748-3094 or tollfree 866 SATCOM1  
 Fax 970 748-3096  
 www.satcomresources.com

Specifications listed in this document are subject to change without notice.

X-Band products may be subject to ITAR restrictions and should not be exported from the U.S. without obtaining proper licensing from the appropriate government agencies.