


China Starwin 2.4M KA BAND ANTENNA DATASHEET

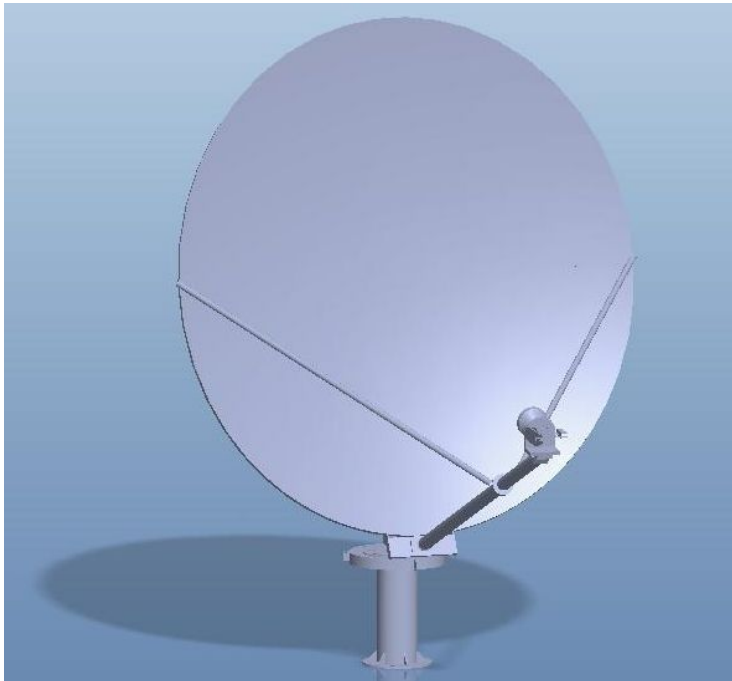

General description

China Starwin 2.4 m Ka band antenna delivers exceptional high performance for transmit/receive application with high gain ,low noise and low microwave interference.

China Starwin 2.4m Ka band antenna offers a fine reflector design with a stretch formed panels . The standard designed azimuth over elevation pedestal provides a cost-effective solution for ground or roof installation with high stiffness ,stability and good wind resistance .

The electrical performance is compliant with FCC and ITU-RS-580 sidelobe specifications and Intelsat ,Eutelsat, INMARSAT, ASIASAT,APT and CHINASAT, etc requirement.

China Starwin Science&Technology Co., Ltd.

Tel:+8629-87650669,E-mail:sales@starwincom.com,<http://www.starwincom.com>

Copyright©2016 Starwin

Technical Specification

Item No.	SW240KA-CP2 (Starwin 2.4m ka band antenna)
Antenna diameter	2.4m
Antenna type	Offset
Antenna pedestal type	Kingpost
Antenna drive mode	Manual
Antenna working frequency	Ka 1Tx: 29GHz~30GHz Ka 1Rx: 19.7GHz~20.2GHz
Antenna gain (dBi)	Tx : $G \geq 54.0 + 20 \lg(f/29.5)$ Rx : $G \geq 51.1 + 20 \lg(f/19.95)$
VSWR	$\leq 1.40:1$
POLARIZATION	CIRCULAR
First Sidelobe	$\leq -14\text{dB}$
Feed interface	Rx port: WR42, Tx port: WR28
Driving range	Azimuth: $\pm 90^\circ$ under Elevation : $5^\circ \sim +85^\circ$
Working speed	Work under fifth level wind
Working temperature	$-40^\circ\text{C} \sim +55^\circ\text{C}$ (outdoor)