



HP4-71W-D3A/A

1.2 m | 4 ft High Performance Parabolic Shielded Antenna, single-polarized, 7.125–8.500 GHz, PDR84, gray antenna, enhanced white radome without flash, standard pack—one-piece reflector

Product Classification

Product Type: Microwave antenna

General Specifications

| | |
|------------------------|--|
| Antenna Type | HP - High Performance Parabolic Shielded Antenna, single-polarized |
| Diameter, nominal | 1.2 m 4 ft |
| Packing | Standard pack |
| Radome Color | White |
| Radome Material | Enhanced |
| Reflector Construction | One-piece reflector |
| Antenna Input | PDR84 |
| Antenna Color | Gray |
| Antenna Type | HP - High Performance Parabolic Shielded Antenna, single-polarized |
| Diameter, nominal | 1.2 m 4 ft |
| Flash Included | Yes |
| Polarization | Single |

Electrical Specifications

| | |
|--|-------------------|
| Operating Frequency Band | 7.125 – 8.500 GHz |
| Beamwidth, Horizontal | 2.4 ° |
| Beamwidth, Vertical | 2.4 ° |
| Electrical Compliance | ETSI Class 2 |
| Gain, Low Band | 36.0 dBi |
| Gain, Mid Band | 36.6 dBi |
| Gain, Top Band | 37.5 dBi |
| Operating Frequency Band | 7.125 – 8.500 GHz |
| Radiation Pattern Envelope Reference (RPE) | 0810A |
| Return Loss | 23.1 dB |
| VSWR | 1.15 |

Electrical Specifications (Band 2)

| | |
|---------------------|-------|
| Front-to-Back Ratio | 60 dB |
|---------------------|-------|

Mechanical Specifications

HP4-71W-D3A/A


| | |
|-------------------------------|--------------------|
| Fine Azimuth Adjustment | ±15° |
| Fine Elevation Adjustment | ±20° |
| Mounting Pipe Diameter | 115 mm 4.5 in |
| Net Weight | 69 kg 152 lb |
| Side Struts, Included | 1 inboard |
| Side Struts, Optional | 1 inboard |
| Wind Velocity Operational | 110 km/h 68 mph |
| Wind Velocity Survival Rating | 200 km/h 125 mph |

Wind Forces At Wind Velocity Survival Rating

| | |
|---------------------------------------|------------------|
| Angle α for MT Max | -130 ° |
| Axial Force (FA) | 3158 N 710 lbf |
| Side Force (FS) | 1546 N 348 lbf |
| Twisting Moment (MT) | 1072 N•m |
| Weight with 1/2 in (12 mm) Radial Ice | 356 kg 784 lb |
| Zcg with 1/2 in (12 mm) Radial Ice | 524 mm 21 in |
| Zcg without Ice | 335 mm 13 in |

HP4-71W-D3A/A

Wind Forces At Wind Velocity Survival Rating Image

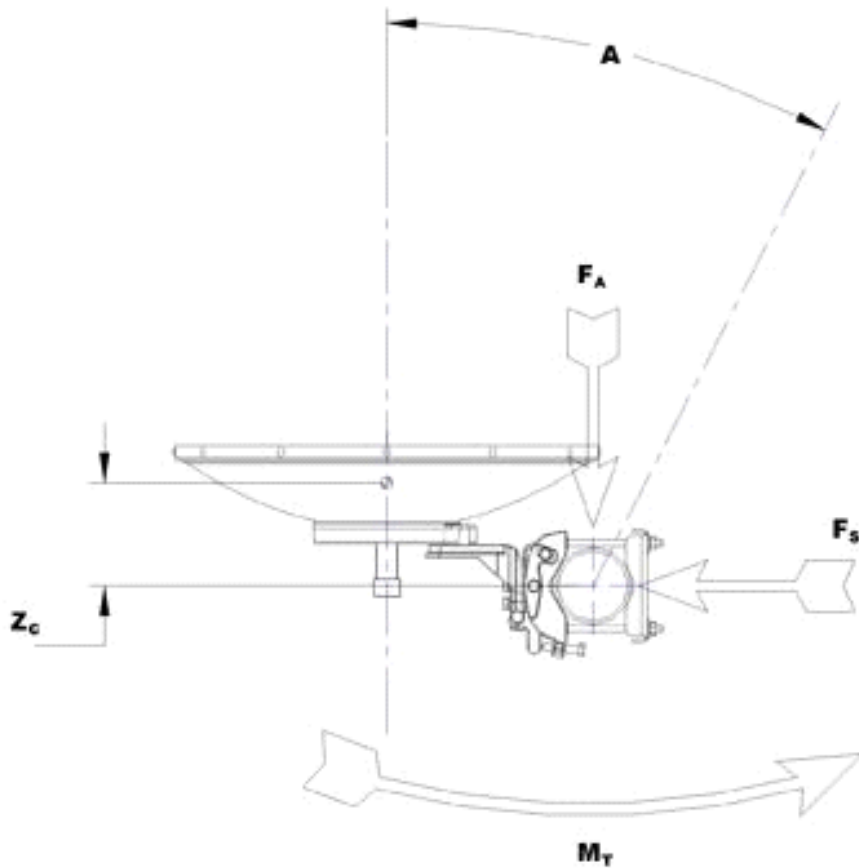


Packed Dimensions

| | |
|------------------------------|---------------------|
| Gross Weight, Packed Antenna | 168.0 kg 370.4 lb |
| Height | 840.0 mm 33.1 in |
| Length | 1430.0 mm 56.3 in |
| Volume | 1.7 m ³ |
| Width | 1430.0 mm 56.3 in |

HP4-71W-D3A/A

Antenna Dimensions And Mounting Information

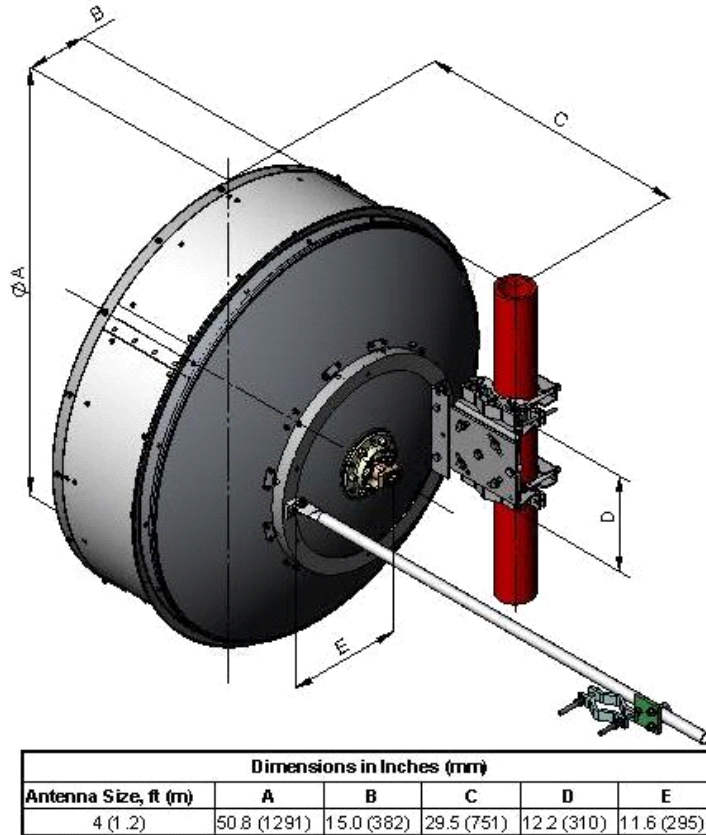

* Footnotes

| | |
|--|---|
| Axial Force (FA) | Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe. |
| Gain, Mid Band | For a given frequency band, gain is primarily a function of antenna size. The gain of Andrew antennas is determined by either gain by comparison or by computer integration of the measured antenna patterns. |
| Operating Frequency Band | Bands correspond with CCIR recommendations or common allocations used throughout the world. Other ranges can be accommodated on special order. |
| Packing | Andrew standard packing is suitable for export. Antennas are shipped as standard in totally recyclable cardboard or wire-bound crates (dependent on product). For your convenience, Andrew offers heavy duty export packing options. |
| Radiation Pattern Envelope Reference (RPE) | Radiation patterns define an antenna's ability to discriminate against unwanted signals. Under still dry conditions, production antennas will not have any peak exceeding the current RPE by more than 3dB, maintaining an angular accuracy of +/-1° throughout |
| Return Loss | The figure that indicates the proportion of radio waves incident upon the |

HP4-71W-D3A/A

| | |
|-------------------------------|--|
| | antenna that are rejected as a ratio of those that are accepted. |
| Side Force (FS) | Maximum side force exerted on the mounting pipe as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe. |
| Twisting Moment (MT) | Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe. |
| VSWR | Maximum; is the guaranteed Peak Voltage-Standing-Wave-Ratio within the operating band. |
| Wind Velocity Operational | The wind speed where the antenna deflection is equal to or less than 0.1 degrees. In the case of ValuLine antennas, it is defined as a maximum deflection of 0.3 x the 3 dB beam width of the antenna. |
| Wind Velocity Survival Rating | The maximum wind speed the antenna, including mounts and radomes, where applicable, will withstand without permanent deformation. Realignment may be required. This wind speed is applicable to antenna with the specified amount of radial ice. |