



60W Ext. Ku-Band Block Up Converter

KEY FEATURES


- ◆ Output frequency 13.75-14.50 GHz
- ◆ Double- L.O. (switchable 12.80 & 13.05 GHz)
- ◆ Based on GaN technology which enables high efficiency, low power consumption and high reliability
- ◆ Incomparable low power consumption (299W max.)
- ◆ Auto-ranging powering option 80 - 240 VAC
- ◆ Digital temperature compensation
- ◆ Field-exchangeable (F/N) IF connector
- ◆ Amplifier, L.O. and 10 MHz Reference Status LEDs
- ◆ M&C - combined RS-232/485 and optional FSK
- ◆ RoHS compliant
- ◆ Three year warranty

ABDN60KX / ABDN60KXF



This smallest and lightest 60W L-To Ku-Band Block Up Converter is based on GaN technology. Incomparable low power consumption, double L.O., field-exchangeable connector, auto-sensing and controllable internal 10 MHz reference make this unit universal for any Ku-Band application. AC Built-in power and consumes less than 299W..

Mechanical Drawing

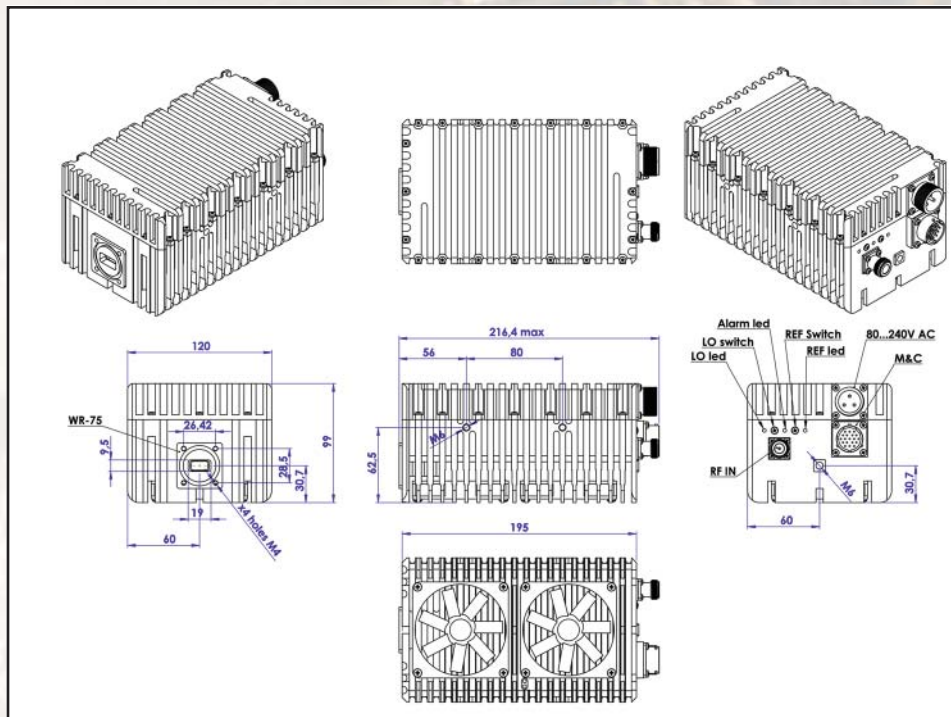



60W Ext. Ku-Band Block Up Converter

TECHNICAL SPECIFICATIONS		
RF frequency		14.00 to 14.50 GHz 13.75 to 14.50 GHz
Dual local oscillator		13.05 GHz and 12.80 GHz
IF frequency		950 to 1,700 MHz
Output power		60W (+47.8 dBm min.) 30W (+44.8 dBm min.) P-Linear
IF connector		N-type or F-type (field-exchangeable)
Power supply auto-ranging		80 ~ 240 VAC via MS connector, 299W max.
Output interface		WR-75 G
Gain		72 dB typ.
IMD3 (two tones)		-26 dBc max. 2 signal 5 MHz apart at P-LINEAR
L.O. leakage		-45 dBm max
Spurious		-50 dBc max
Spectral regrowth (QPSK at 1.5x and OQPSK at 1.0x symbol rate offset with 2dB back-off from rated output power)		-30 dBc
Requirement for external reference:		via IF cable
frequency		10 MHz (sine-wave)
input power		-5 to +5 dBm @ input port
TX Gain variation		± 0.5 dB over 40 MHz
TX Gain stability over temperature range		± 1.8 dB over full band ± 1.5 dB typ., ± 1.8 dB max.
Phase noise		-55 dBc/Hz max. @ 10 Hz
(Exceeds Intelsat's standard IESS308/309)		-65 dBc/Hz max. @ 100 Hz
		-75 dBc/Hz max. @ 1 KHz
		-85 dBc/Hz max. @ 10 KHz
		-95 dBc/Hz max @ 100 KHz
		-115 dBc/Hz max @ 1 MHz
Noise power density	Transmit	-80 dBm/Hz (max)
	Receive	-125 dBm/Hz (max)
Noise figure		15 dB max
Input V.S.W.R.		2 : 1 max
Output V.S.W.R.		2 : 1 max.
M&C		RS-232 and RS-485, Ethernet (HTTP and SNMP), FSK
Mute		Shut off the HPA if L.O. unlocked
Status LED		
Amplifier	RED	Summary alarm
	GREEN	All OK
L.O.	YELLOW	All OK standard L.O. 13.05 GHz
	YELLOW blinking	All OK extended L.O. 12.80 GHz
10MHz	GREEN	External 10MHz reference
	GREEN blinking	Internal 10MHz reference
	RED	No 10MHz reference detected
Temperature range (ambient)		
operating		-40 deg C to +55 deg C
storage		-55 deg C to +85 deg C
Vibration and shock		Complies with MIL-STD-810E
Dimensions & housing		195 (L) x 120 (W) x 99 (H) mm 7.8" (L) x 4.72" (W) x 3.9" (H)
Weight		2.8 kg (6.17 lbs) max